



English

PROFILMAR

GENERAL CATALOG 2024

First partner of metal roller door manufacturers

French manufacturer



SINCE 1991

www.profilmar.fr
www.profilight.fr
www.profilblock.fr



PROFILMAR



ABOUT US

PRESENTATION

Founded in 1991, PROFILMAR is at the beginning a family company. For more than 20 years now, our company has been located in La Valentine in Marseille, close to major traffic highways. With more than 10,000 m² of surface area, automated and robotic, PROFILMAR has established itself today as the French leader and **first accessories partner of metallic doors manufacturers.**

OUR STRENGTHS

Our expertise allows us to continually **increase our contribution to the French and international market.** We export 30% of our production around the world and are constantly developing our market.

We also invest in new technologies and industrial tools **allowing us to design superior quality products.** This is how our **PROFILIGHT** transparent security door range now includes three variations: Solid, Glass, Home, allowing us to provide the solution that adapts to all configurations each time.

Another illustration of our innovative capabilities, the **PROFILBLOCK** is an easy-to-install device to stop or delay heavy burglaries made using powerful electrical tools (level 4 according to the standards). Its simplicity of installation also allows it to be used on all kinds of openings or partitions already in place.

OUR SKILLS

PROFILING, POWDER COATING, CUTTING, PERFORATION, FOLDING, STAMPING, ASSEMBLY, INJECTION, or even **EXTRUSION** are part of our core business and allow us to support our customers from the beginning of a project to final installation.

The notion of quality is closely linked **to compliance with European standards.** This is how, since 2005, PROFILMAR has allowed its customers to benefit from specific tools allowing **the application and validation of the EN NF 13241-1 standard.** This standard requires specific manufacturing, installation and use conditions developed by Profilmar and certified by the CETIM.

This collaboration allows our customers to use **CE certification** with their products at no additional cost and reinforces the overall service concept.

OUR MISSIONS

By providing our customers, manufacturers of metallic and transparent security doors or roller shutters, with all the necessary profiles and accessories, **our ambition is to be a lifelong partner at their side.** Providing them with a range of reliable and tailor-made services is part of our DNA.

This is how we support them with the following assets: **manufacturing training, sizing assistance, logistical strengths, etc.** An engaging promise: to be at their side with responsiveness, services, and performance.

SUMMARY

METAL SHUTTER SLATS

METAL SHUTTER SLATS
BOTTOM SLATS
DOUBLE-WALLED SLAT
SLAT MADE OF ALUMINIUM AND ACCESSORIES
STAINLESS STEEL SLATS AND ACCESSORIES


P 1



ROLLABLE GRILLES

CORRUGATED GRILLES
BRICK - BOND GRILLES

P 21



POLYCARBONATE TRANSPARENT SHUTTER

TRANSPARENT SHUTTER
ACCESSORIES

P 27



PROFILBLOCK

PROTECTION ARMOUR AGAINST BURGLARY ATTEMPTS

P 35



GUIDE RAILS AND ACCESSORIES FOR GUIDE RAILS AND CORNER IRONS

SIMPLE CORNER IRONS AND ACCESSORIES
ANTI-FALL AND ACCESSORIES

P 39



ACCESSORIES FOR METAL SHUTTERS AND ROLLABLE GRILLES

SIMPLE SPRING BOXES
ANTI-FALL SPRING BOXES
ACCESSORIES FOR SPRING BOXES
VARIOUS ACCESSORIES


P 47



TUBES

SQUARE TUBES AND RECTANGULAR TUBES
ROUND TUBES

P 65



MOTOR, ACCESSORIES AND AUTOMATIC CONTROL SYSTEMS


CENTRAL MOTOR AND ACCESSORIES
LATERAL MOTOR AND ACCESSORIES
AUTOMATIC CONTROL SYSTEMS

P 69




MOTOR, ACCESSORIES FOR FOR WINDOWS ROLLING SHUTTERS

P 85




HARDWARE ITEMS





P 87



CUSTOM WORK

P 89



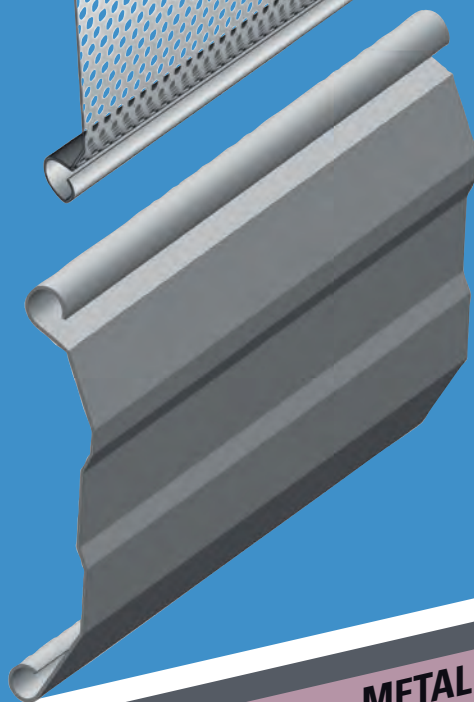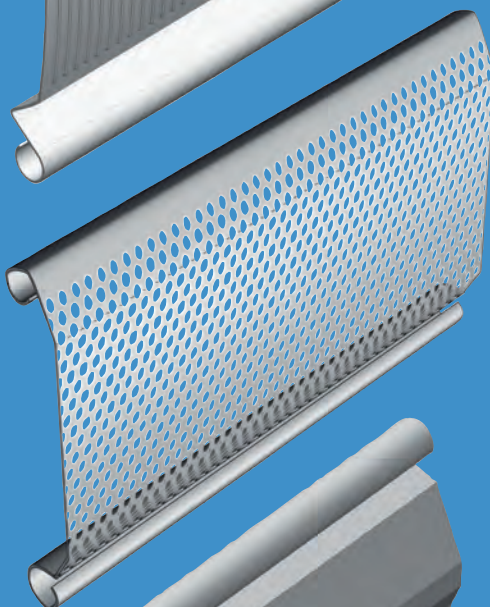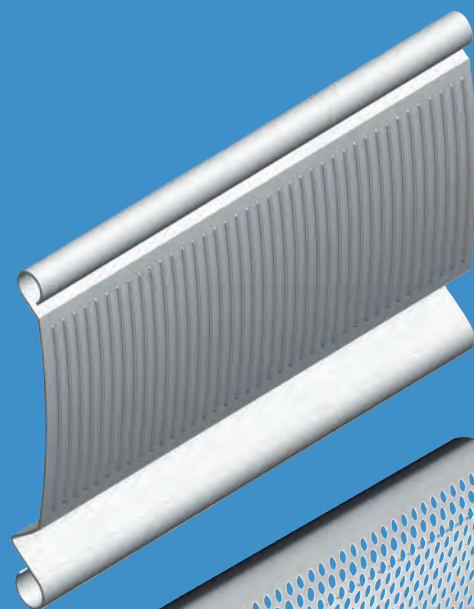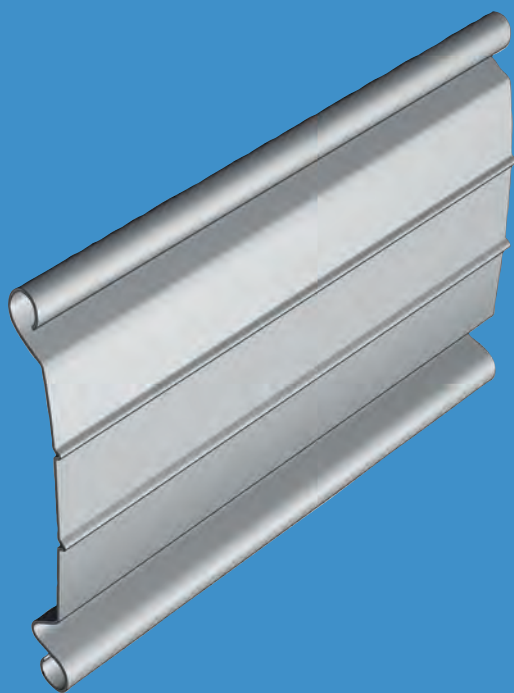

METAL SHUTTER SLATS

METAL SHUTTER SLATS
BOTTOM SLATS

DOUBLE-WALLED SLAT



ALUMINIUM SLAT AND ACCESSORIES

STAINLESS STEEL SLATS AND ACCESSORIES

PROFILMAR

Metal shutter slats

P57 SLATS

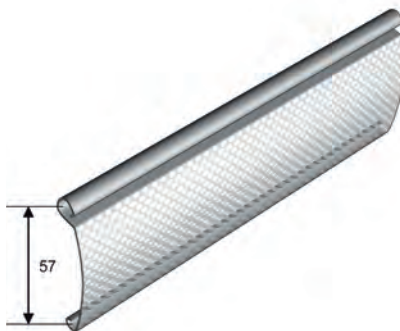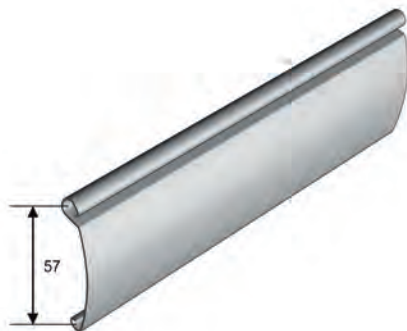

LACEN5

REFERENCE	DESCRIPTION				WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	--	--	--	-----------------	-----------------------------	---------------	-------------------	---------------

P 57 slat made of galvanised steel

L5GXX07	steel	galvanised		0,7mm	0,56	9,82	LM	50 50	8,5 LM* (1) (2)
L5GXP07	steel	galvanised	perforated (4)	0,7mm	0,44	7,72	LM	50	(1) (2)

P 57 slat made of ral 9010 white pre-lacquered steel (30 microns - 2 sides)

L5GBX07	steel	White ral 9010		0,7mm	0,56	9,82	LM	50 50	8,5 LM* (1) (2)
L5GBP07	steel	White ral 9010	perforated (5)	0,7mm	0,44	7,72	LM	50	(1) (2)

P 57 slat made of stainless steel (316L)

L5IXX06	steel	stainless		0,6mm	0,48	8,42	LM	50	(1) (2)
L5IXP06	steel	stainless	perforated	0,6mm	0,35	6,14	LM	50	(1) (2)

Nylon endcaps

LACEN5	Nylon endcap for P57 slats				0,006		U	500 (3)	
---------------	-----------------------------------	--	--	--	-------	--	---	---------	--

* Length in stock (tolerance of + or - 5 cm).

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 10 metres.

(2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.


(3) Possibility to order exact quantities. However, price conditions could change.

(4) Epoxy coating is required when the curtain is to be installed outside.


(5) Curtain installed inside.

Metal shutter slats

P80 SLATS

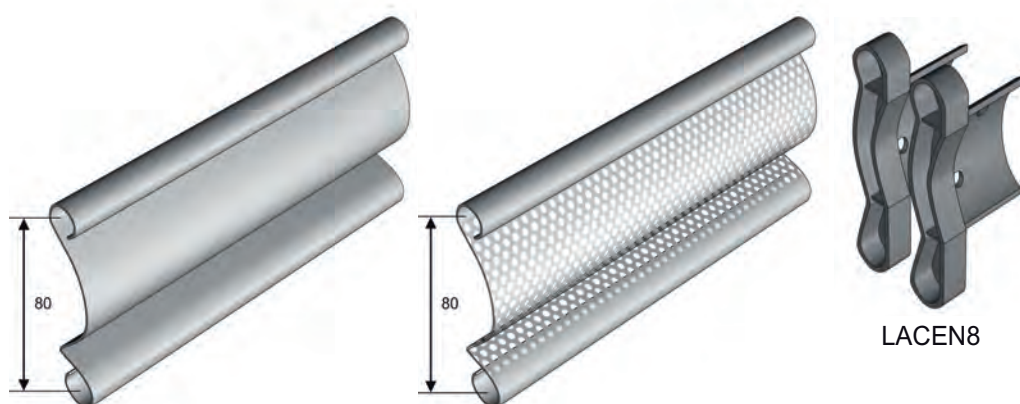

LITTORAL SLATS

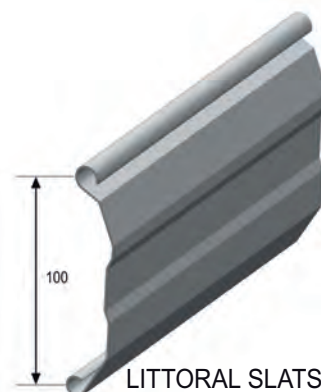

REFERENCE	DESCRIPTION				WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	--	--	--	-----------------	-----------------------------	---------------	-------------------	---------------

P 80 slat made of galvanised steel

L8GXX07	steel	galvanised		0,7mm	0,91	11,41	LM	48	(1) (2)
L8GXX10	steel	galvanised		1mm	1,30	16,30	LM	48	(1) (2)
L8GXP10	steel	galvanised	perforated (4)	1mm	1,01	12,62	LM	48	(1) (2)
L8GXX12	steel	galvanised		1,2mm	1,56	19,50	LM	48	(1) (2)

P 80 slat made of stainless steel (316L)

L8IXX08	steel	stainless		0,8mm	1,03	12,88	LM	48	max. 8LM (2)
L8IXP08	steel	stainless	perforated	0,8mm	0,75	9,38	LM	48	max. 8LM (2)

Nylon endcaps

LACEN8	Pair of endcaps for P 80 slats				0,024		U	250 (3)	
--------	--------------------------------	--	--	--	-------	--	---	---------	--


P 100 LITTORAL made of galvanised steel

L1GXX06	Lame LITTORAL galv			0,6mm	0,763	7,63	ML	50	(1)
L1GXX10	Lame LITTORAL galv			1mm	1,276	12,76	ML	50	(1)
L1GXP10	Lame LITTORAL galv PERFO			1mm	0,890	8,90	ML	50	(1)
L1GBX08	Lame LITTORAL BLANC			0,8mm	1,018	10,18	ML	50	(1)
L1GBP10	Lame LITTORAL BLANC PERFO			1mm	0,890	8,90	ML	50	(1)

- (1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 12,5 metres.
 (2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.
 (3) Possibility to order exact quantities. However, price conditions could change.
 (4) Epoxy coating is required when the curtain is to be installed outside.

Metal shutter slats

P100 SLATS

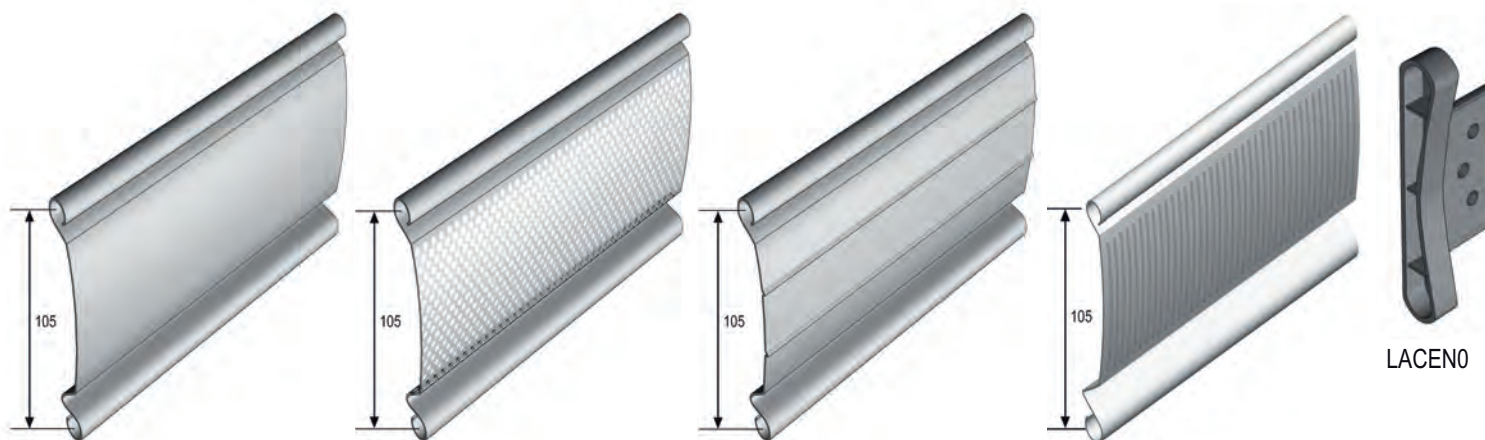

REFERENCE	DESCRIPTION				WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	--	--	--	-----------------	-----------------------------	---------------	-------------------	---------------

P 100 slat made of galvanised steel

L0GXX07	steel	galva	0,7mm	0,90	8,59	LM	54	(1) (2)
L0GXN07	steel	galva	ribbed 0,7mm	0,90	8,59	LM	54	(1) (2)
L0ZXS07	steel	galva	ribbed 0,7mm	0,90	8,59	LM	54	(1) (2)
L0GXP10	steel	galva	perforated (4) 1mm	1,00	9,52	LM	54	(1) (2)
L0GXX10	steel	galva	1mm	1,29	12,27	LM	54	(1) (2)
L0GXN10	steel	galva	ribbed 1mm	1,29	12,27	LM	54	(1) (2)

P 100 slat made of stainless steel (316L)

L0IXX08	steel	stainless	0,8MM	1,03	9,81	LM	54	(1) (2)
L0IXP08	steel	stainless	perforated 0,8MM	0,75	7,14	LM	54	(1) (2)


Nylon endcaps

LACEN0	Nylon endcap for P100 slats			0,015	U	500 (3)
--------	-----------------------------	--	--	-------	---	---------

- (1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 12,5 metres.
 (2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.
 (3) Possibility to order exact quantities. However, price conditions could change.
 (4) Epoxy coating is required when the curtain is to be installed outside.

Metal shutter slats

P107 SLATS (part 1/2)

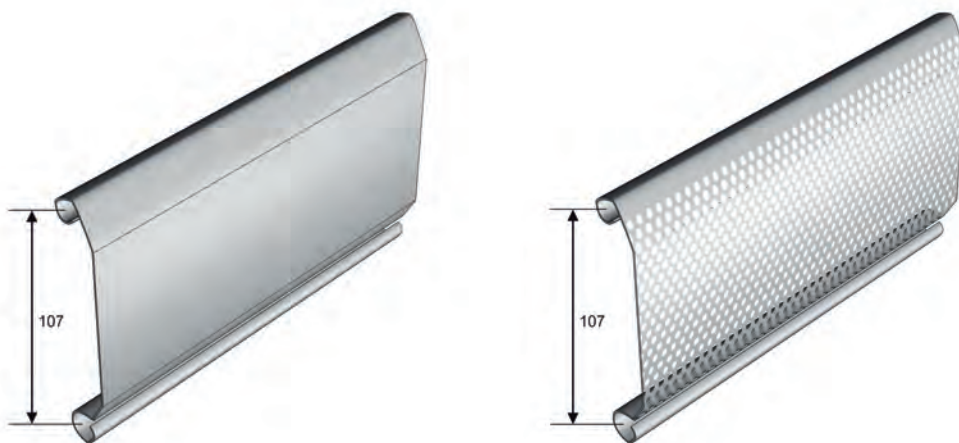

REFERENCE	DESCRIPTION				WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	--	--	--	-----------------	-----------------------------	---------------	-------------------	---------------

P 107 slat made of galvanised steel

L7GXX07	steel	galvanised		0,7mm	1,00	9,37	LM	72 72 72	8,5 LM* 10 LM* (1) (2)
L7GXX09	steel	galvanised		0,9mm	1,29	12,04	LM	54	(1) (2)
L7GXP09	steel	galvanised	perforated (4)	0,9mm	1,02	9,53	LM	54	(1) (2)
L7GXX11	steel	galvanised		1,1mm	1,58	14,72	LM	54	(1) (2)
L7GXP11	steel	galvanised	perforated (4)	1,1mm	1,25	11,68	LM	54	(1) (2)
L7GXX12	steel	galvanised		1,2mm	1,72	16,06	LM	54	(1) (2)
L7GXX15	steel	galvanised		1,5mm	2,15	20,07	LM	54	(1) (2)

P 107 slat made of ral 9010 white pre-lacquered steel (30 microns - 2 sides)

L7GBX07	steel	White ral 9010		0,7mm	1,00	9,37	LM	54	(1) (2)
L7GBX09	steel	White ral 9010		0,9mm	1,29	12,04	LM	54	(1) (2)
L7GBP09	steel	White ral 9010	perforated (5)	0,9mm	1,02	9,53	LM	54	(1) (2)
L7GBX11	steel	White ral 9010		1,1mm	1,58	14,72	LM	54	(1) (2)
L7GBP11	steel	White ral 9010	perforated (5)	1,1mm	1,25	11,68	LM	54	(1) (2)

* Length in stock (tolerance of + or - 5 cm).

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 12,5 metres.

(2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.


(3) Possibility to order exact quantities. However, price conditions could change.

(4) Epoxy coating is required when the curtain is to be installed outside.

(5) Curtain installed inside.

Metal shutter slats

P107 SLATS (part 2/2)

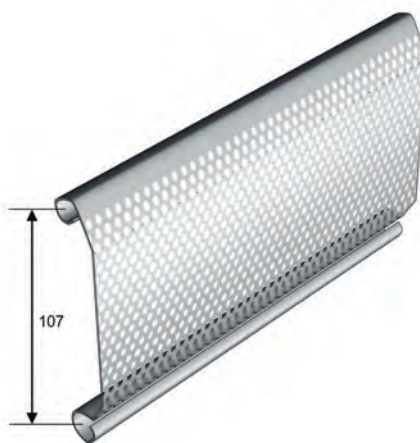

LACEN7

REFERENCE	DESCRIPTION				WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	--	--	--	-----------------	-----------------------------	---------------	-------------------	---------------

P 107 slat made of brown lacquer coated steel (30 microns - 2 sides)

L7GRX07	steel	Brown		0,7mm	1,00	9,37	LM	54	(1) (2)
L7GRX09	steel	Brown		0,9mm	1,29	12,04	LM	54	(1) (2)
L7GRP09	steel	Brown	perforated (5)	0,9mm	1,02	9,53	LM	54	(1) (2)

P 107 slat made of coarse aluminium

L7AXX12	aluminium	coarse		1,2mm	0,59	5,52	LM	54	(1) (2)
L7AXP12	aluminium	coarse	perforated (5)	1,2mm	0,47	4,37	LM	54	(1) (2)


Nylon endcaps

LACEN7	Nylon endcap for P107 slat				0,013		U	500 (3)	
--------	----------------------------	--	--	--	-------	--	---	---------	--

- (1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 12,5 metres.
 (2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.
 (3) Possibility to order exact quantities. However, price conditions could change.
 (5) Curtain installed inside.

Metal shutter slats

P116 SLATS (part 1/2)

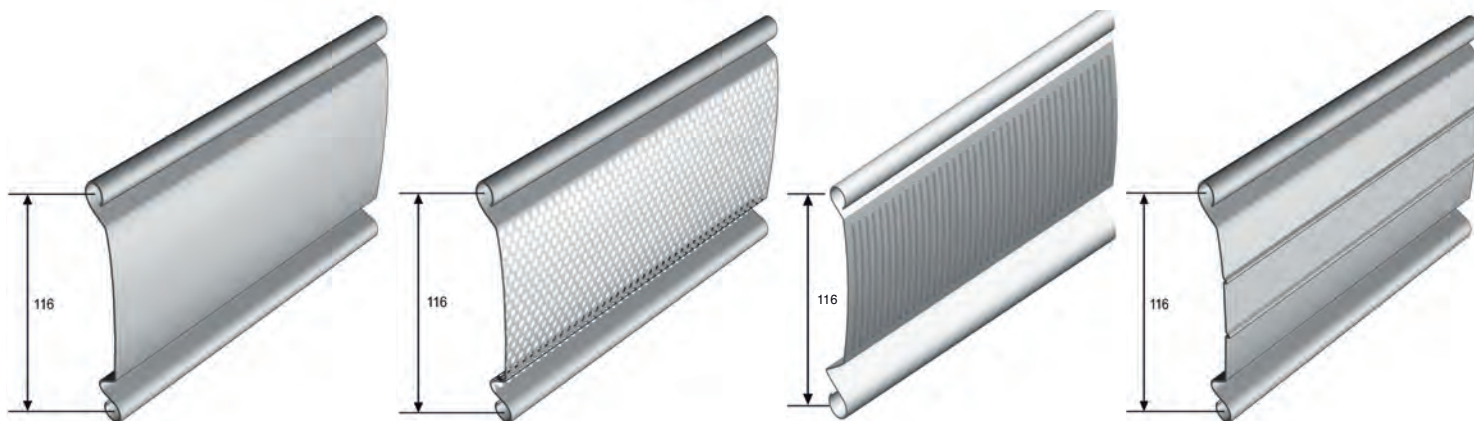

REFERENCE	DESCRIPTION				WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	--	--	--	-----------------	-----------------------------	---------------	-------------------	---------------

P 116 slat made of galvanised steel

L6GXX07	steel	galvanised		0,7mm	1,00	8,64	LM	54	(1) (2)
L6GXN07	steel	galvanised	ribbed	0,7mm	1,00	8,64	LM	54	(1) (2)
L6ZXS07	steel	galvanised	ribbed	0,7mm	1,00	8,64	LM	54	(1) (2)
L6GXX09	steel	galvanised		0,9mm	1,29	11,11	LM	54	(1) (2)
L6GXP09	steel	galvanised	perforated (4)	0,9mm	1,02	8,79	LM	54	(1) (2)
L6GXN09	steel	galvanised	ribbed	0,9mm	1,29	11,11	LM	54	(1) (2)
L6GXX11	steel	galvanised		1,1mm	1,58	13,58	LM	54	(1) (2)
L6GXP11	steel	galvanised	perforated (4)	1,1mm	1,25	10,78	LM	54	(1) (2)
L6GXX12	steel	galvanised		1,2mm	1,72	14,81	LM	54	(1) (2)


P 116 slat made of ral 9010 white pre-lacquered steel (30 microns - 2 sides)

L6GBX07	steel	White ral 9010		0,7mm	1,00	8,64	LM	54	(1) (2)
L6GBN07	steel	White ral 9010	ribbed	0,7mm	1,00	8,64	LM	54	(1) (2)
L6GBX09	steel	White ral 9010		0,9mm	1,29	11,11	LM	54	(1) (2)
L6GBP09	steel	White ral 9010	perforated (5)	0,9mm	1,02	8,79	LM	54	(1) (2)
L6GBN09	steel	White ral 9010	ribbed	0,9mm	1,29	11,11	LM	54	(1) (2)
L6GBX11	steel	White ral 9010		1,1mm	1,58	13,58	LM	54	(1) (2)
L6GBP11	steel	White ral 9010	perforated (5)	1,1mm	1,25	10,78	LM	54	(1) (2)

- (1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 12,5 metres.
 (2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.
 (3) Possibility to order exact quantities. However, price conditions could change.
 (4) Epoxy coating is required when the curtain is to be installed outside.
 (5) Curtain installed inside.

Metal shutter slats

P116 SLATS (part 2/2)

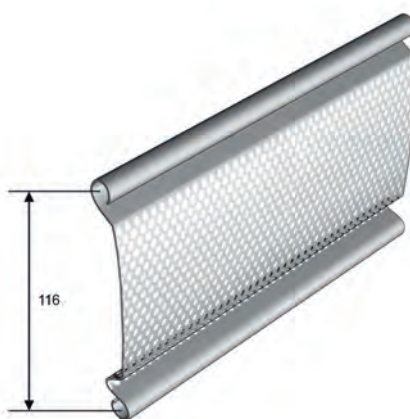

LACEN6

REFERENCE	DESCRIPTION				WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	--	--	--	-----------------	-----------------------------	---------------	-------------------	---------------

P 116 slat made of brown pre-lacquered steel (30 microns - 2 sides)

L6GRX07	steel	gris ral 7016		0,7mm	1,00	8,64	LM	54	(1) (2)
L6GRN07	steel	gris ral 7016	ribbed	0,7mm	1,00	8,64	LM	54	(1) (2)
L6GRX09	steel	gris ral 7016		0,9mm	1,29	11,11	LM	54	(1) (2)
L6GRP09	steel	gris ral 7016	perforated (5)	0,9mm	1,02	8,79	LM	54	(1) (2)
L6GRN09	steel	gris ral 7016	ribbed	0,9mm	1,29	11,11	LM	54	(1) (2)

P 116 slat made of coarse aluminium

L6AXX10	aluminium	coarse		1,1mm	0,49	4,24	LM	54	(1) (2)
---------	-----------	--------	--	-------	------	------	----	----	---------


Nylon endcaps

LACEN6	Nylon endcap for P116 slat				0.017		U	500 (3)	
--------	----------------------------	--	--	--	-------	--	---	---------	--

- (1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 12,5 metres.
 (2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.
 (3) Possibility to order exact quantities. However, price conditions could change.
 (4) Epoxy coating is required when the curtain is to be installed outside.
 (5) Curtain installed inside.

Bottom slats for metal shutters

P 90 BOTTOM SLATS

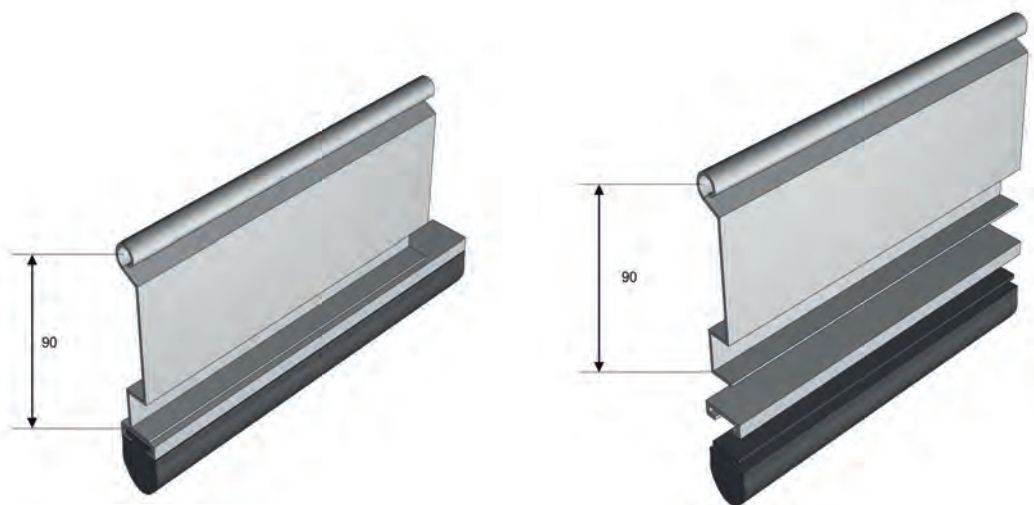

REFERENCE	DESCRIPTION			WEIGHT KG/LM	WEIGHT KG/M²	SALES UNIT	CONDITIO- NING	BAR LENGTH
P 90 bottom slat made of galavanised steel								
LF9GXX15	steel	galvanised	1,5mm	1,68		LM	5	8,5 LM* (1)(2)
P 90 bottom slat made of ral 9010 white pre-lacquered steel (30 microns - 2 sides)								
LF9GBX15	steel	White ral 9010	1,5mm	1,68		LM	5	8,5 LM* (1)(2)
P 90 bottom slat made of stainless steel (316 L)								
LF9IXX12	steel	stainless	1,2mm	1,34		LM	5	8,5 LM* (1)(2)
Accessories for P 90 bottom slats								
LFACARJO	Rubber weatherseal for bottom slat			0,35		LM	roller	30 lm
LFACARU	“U 22 x 8” made of galvanised steel for O’ring seals			0,456		LM	5 x 6 lm	6 lm*
LFACARU INOX	“U 22 x 8” made of stainless steel for O’ring seals			0,380		LM	1 x 6 lm	6 lm*


* Length in stock (tolerance of + or - 5 cm) .

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 12,5 metres.

(2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.

Bottom slats for metal shutters

P 140 BOTTOM SLATS

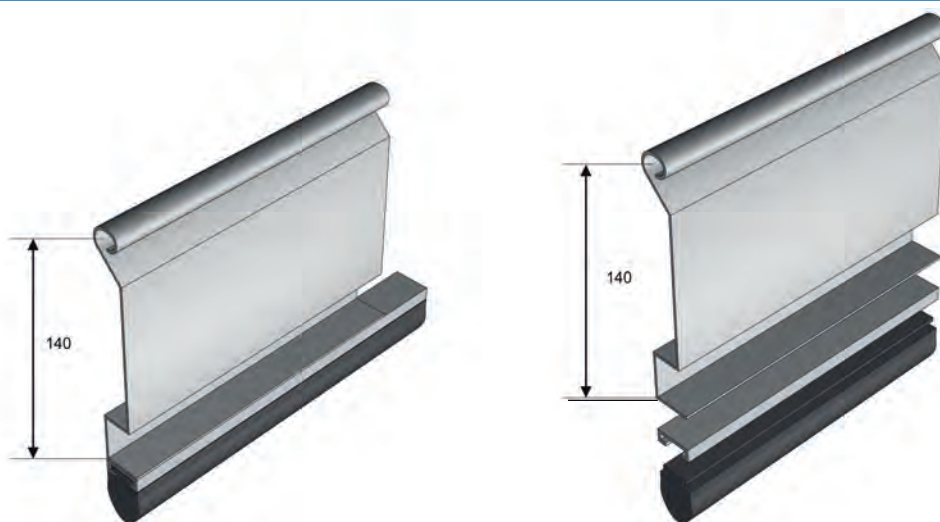

REFERENCE	DESCRIPTION				WEIGHT KG/LM	WEIGHT KG/M²	SALES UNIT	CONDITIO- NING	BAR LENGTH	
P 140 bottom slat made of galvanised steel										
LF4GXX15	steel	galvanised		1,5mm	2,35		LM	10	8,5 LM* or (2)	
LF4GXX20	steel	galvanised		2,0mm	3,14		LM	10	10 LM* or (2)	
P 140 bottom slat made of ral 9010 white pre-lacquered steel (30 microns - 2 sides)										
LF4GBX15	steel	White ral 9010		1,5mm	2,35		LM	5	8,5 LM* or (2)	
P 140 bottom slat made of Gray ral 7016 pre-lacquered steel (30 microns - 2 sides)										
LF4GRX15	steel	gray ral 7016		1,5mm	2,35		LM	5	8,5 LM* or (2)	
P 140 bottom slat made of aluminium										
LF4AXX20	aluminium	coarse			2,0mm	1,08		LM	2	8,5 LM* or (2)
P 140 bottom slat made of stainless steel (316 L)										
LF4IXX12	steel	stainless		1,2mm	1,88		LM	2	8,5 ML* or (2)	
Accessories for P 140 bottom slats										
LFACARJO	Weatherseal for final slat				0,35		LM	roller	30 lm	
LFACARU	“U 22 x 8” made of galvanised steel for Weatherseal				0,456		LM	5 x 6 lm	6 lm*	

* Length in stock (tolerance of + or - 5 cm).

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 12,5 metres.


(2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.



PROFILMAR

Metal shutter slats

P112 SLATS

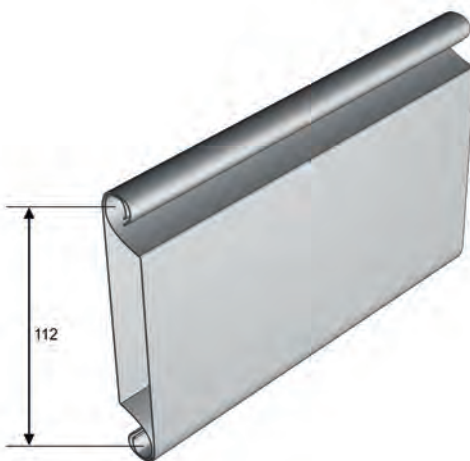


REFERENCE	DESCRIPTION				WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
P 112 slat made of galvanised steel									
L2GXX07	steel	galvanised		0,7mm	2,00	17.90	LM	42	(1)(2)
L2GXX09	steel	galvanised		0,9mm	2.58	23.04	LM	42	(1)(2)
P 112 bottom slat made of ral 9010 white pre-lacquered steel (30 microns - 2 sides)									
L2GBX07	steel	White ral 9010		0,7mm	2,00	17.90	LM	42	(1)(2)
L2GBX09	Slate	P112 DP White	9010	0,9mm	2,578	23,02	LM	42	(1)(2)
P 112 bottom slat made of brown pre-lacquered steel (30 microns - 2 sides)									
L2GRX07	steel	gris ral 7016		0,7mm	2,00	17.90	ML	42	(1)(2)
L2GRX09	steel	gris ral 7016		0,9mm	2,578	23.02	LM	42	(1)(2)
P 112 slat made of coarse aluminium									
L2AXX10	aluminium	coarse		1,1mm	0,98	8,79	LM	42	(1)(2)

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 10 metres.

(2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.

Bottom slats for metal shutters

ALUMINIUM BOTTOM SLAT for P 112

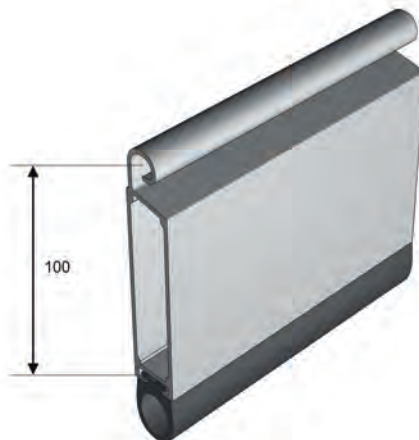

REFERENCE	DESCRIPTION	WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	-----------------	-----------------------------	---------------	-------------------	---------------

bottom slat made of anodised extruded aluminium for P 112

LFEAXX20_L G5_J	Anodised extruded aluminium (with sealing) Length: 5,000 mm	1,40		LM	1	5 LM*
LFEAXX20_L G5_J	Anodised extruded aluminium (with sealing) Length: 7,000 mm	1,40		LM	1	7 LM*

Accessories for bottom slat P 112

LFACARJO	Rubber seal for bottom slat	0,35		LM	roller	30 LM*
----------	-----------------------------	------	--	----	--------	--------

* Length in stock (tolerance of + or - 5 cm).

Accessories for metal shutters

ACCESSORIES FOR P 112 SLATS (part 1/2)



LACEN2



LACEN2I



REFERENCE	DESCRIPTION	WEIGHT KG/U	WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	----------------	-----------------	---------------	-------------------	---------------


Nylon endcap

LACEN2	Normal double-walled nylon endcap	0,026		U	500 (3)	
LACEN2I	Intermediary double-walled nylon endcap	0,022		U	500 (3)	

(3) Possibility to order exact quantities. However, price conditions could change.

Accessories for metal shutters

ACCESSORIES FOR P 112 SLATS (part 2/2)

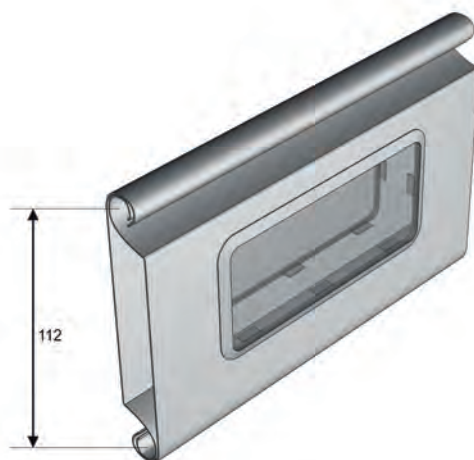

REFERENCE	DESCRIPTION	WEIGHT KG/U	WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	----------------	-----------------	---------------	-------------------	---------------

Perforation

VAPERHUB2	Porthole perforation for P112 double-walled slat - 5 perforations per LM on each side (10 portholes per LM) Maximum use over 10 slats			LM		
LACHU00	Portholes for double-walled P 112 slats	9,50		U	500 (3)	

REFERENCE	DESCRIPTION	WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	-----------------	-----------------------------	---------------	-------------------	---------------

Filling

LACDP00	Polystyrene for double-walled slats including bars of 1,200 mm in length		0,02	LM	300 (3)	1,2
---------	---	--	------	----	---------	-----

(3) Possibility to order exact quantities. However, price conditions could change.

Guide rails and Corner irons

Guide rail 60x50x38x2) for double-walled slat



REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	-----------------	---------------	-------------------	------------

Guide rail (60x50x38x2) for double-walled slat

CLS0600	steel	galvanised	(60X50X38X2)	2,0mm	3,07	LM	1	8,5 LM* or (1)
----------------	--------------	-------------------	---------------------	--------------	------	----	---	----------------

Seal for Guide rails (60x50x38x2)

CLACJO00	Seal for guide rails (ref. CLS0600) for double-walled P 112 slat inside surface				0,15	LM	10	6 LM*
CLACJO01	Wiper seal for guide rails (ref. CLS0600) for double-walled P 112 slat outside surface				0,16	LM	10	6 LM*

* Length in stock (tolerance of + or - 5 cm).



(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning; between 5 and 10 metres.



PROFILMAR

Metal shutter slats

ALUMINIUM P107 SLATS

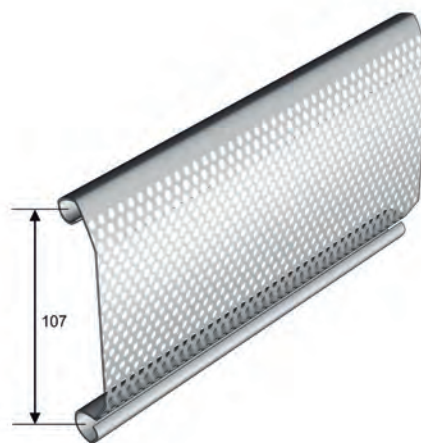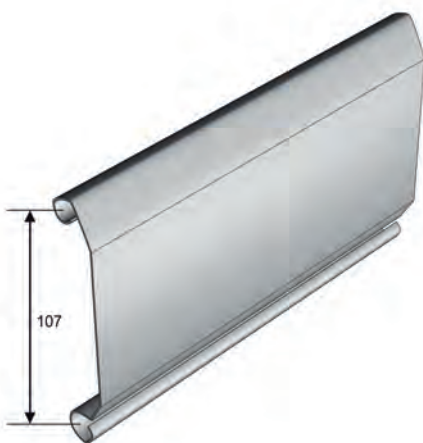

REFERENCE	DESCRIPTION				WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	--	--	--	-----------------	-----------------------------	---------------	-------------------	---------------

P 107 slat made of coarse aluminium

L7AXX12	aluminium	coarse		1,2mm	0,59	5,52	LM	54	(1)(2)
L7AXP12	aluminium	coarse	perforated (5)	1,2mm	0,47	4,37	LM	54	(1)(2)

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 12,5 metres.

(2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.


(5) Curtain installed inside.



PROFILMAR

Metal shutter slats

ALUMINIUM P116 SLATS

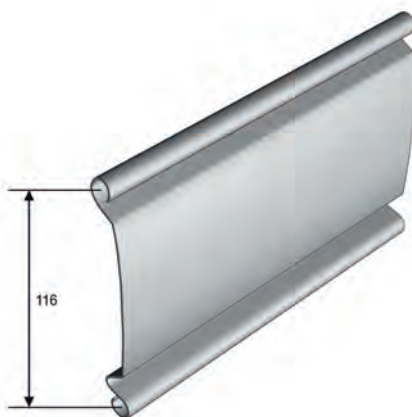

REFERENCE	DESCRIPTION	WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	-----------------	-----------------------------	---------------	-------------------	---------------


P 116 slat made of coarse aluminium

L6AXX10	aluminium	coarse	1,0mm	0,49	4,24	LM	54	(1)(2)
----------------	-----------	--------	-------	------	------	----	----	--------

- (1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 12,5 metres.
(2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.

Bottom slats for metal shutters

ALUMINIUM P140 FINAL SLATS

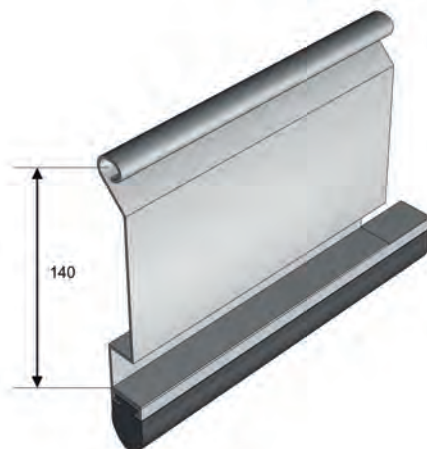

REFERENCE	DESCRIPTION			WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	--	--	-----------------	---------------	-------------------	---------------

P 140 bottom slat made of aluminium

LF4AXX20	aluminium	coarse	2,0mm	1,08	LM	2	8,5 LM* or (1) (2)
----------	-----------	--------	-------	------	----	---	-----------------------

Accessories for P 140 bottom slats

LFACARJO	Rubber weather seal for final slat			0,35	LM	roller	30 lm*
LFACARU	"U 22 x 8" made of galvanised steel for weatherseal			0,456	LM	5 x 6 lm	6 lm*
LFACARU INOX	"U 22 x 8" made of stainless steel for weatherseal			0,380	LM	1 x 6 lm	6 lm*

* Length in stock (tolerance of + or - 5 cm).

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 10 metres.


(2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.



PROFILMAR

Metal shutter slats

STAINLESS STEEL SLATS

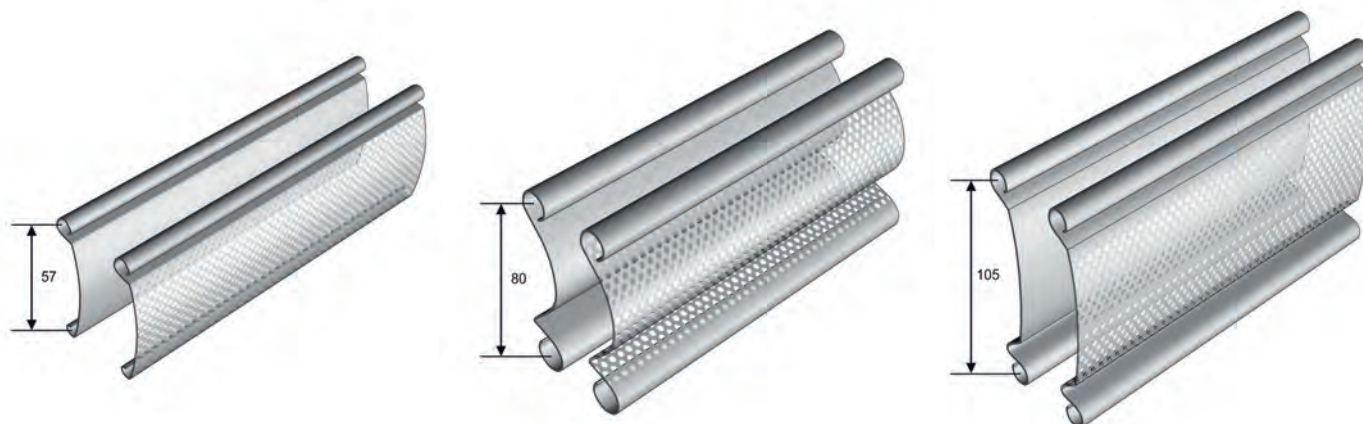

REFERENCE	DESCRIPTION				WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	--	--	--	-----------------	-----------------------------	---------------	-------------------	---------------

P 57 slat made of stainless steel (316L)

L5IXX06	steel	stainless		0,6mm	0,48	8,42	LM	50	8 LM (2) max
L5IXP06	steel	stainless	perforated	0,6mm	0,35	6,14	LM	50	8 LM (2) max

P 80 slat made of stainless steel (316L)

L8IXX08	steel	stainless		0,8mm	1,03	12,88	LM	48	8 LM (2) max
L8IXP08	steel	stainless	perforated	0,8mm	0,75	9,38	LM	48	8 LM (2) max

P 100 slat made of stainless steel (316L)


L0IXX08	steel	stainless		0,8mm	1,03	9,81	LM	54	(1)(2)
L0IXP08	steel	stainless	perforated	0,8mm	0,75	7,14	LM	54	(1)(2)

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 12,5 metres.

(2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.

Bottom slats for metal shutters

STAINLESS STEEL BOTTOM SLATS

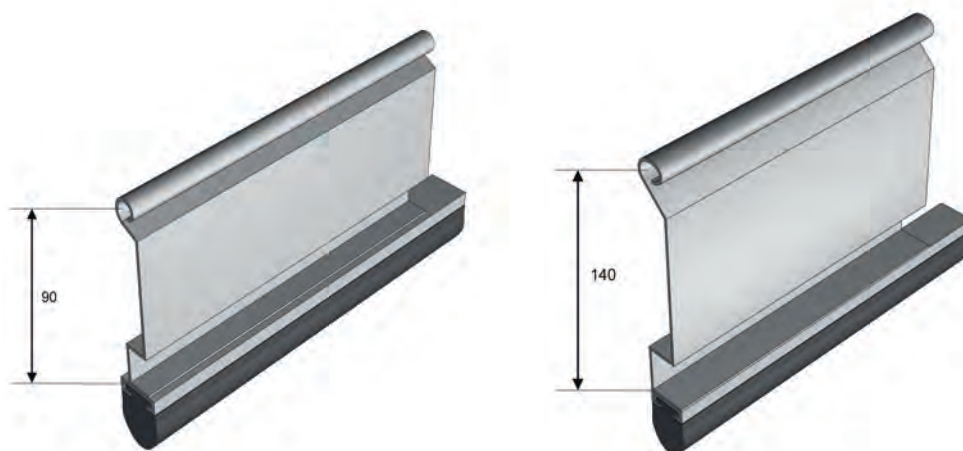

REFERENCE	DESCRIPTION			WEIGHT KG/LM	WEIGHT KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	--	--	-----------------	-----------------------------	---------------	-------------------	---------------

P 90 bottom slat made of stainless steel (316 L)

LF9IXX12	steel	stainless (316L)	1,2mm	1,34		LM	2	8,5 LM* (1) (2)
----------	-------	------------------	-------	------	--	----	---	--------------------

P 140 bottom slat made of stainless steel (316 L)

LF4IXX12	steel	stainless (316L)	1,2mm	1,88		LM	2	8,5 LM* (1) (2)
----------	-------	------------------	-------	------	--	----	---	--------------------

Accessories for bottom slat

LFACARJO	Rubber weatherseal for bottom slat			0,35		LM	roller	30 lm
LFACARU_INOX	"U 22 x 8" made of stainless steel for weatherseal			0,38		LM	1 x 6 lm	6 lm*


* Length in stock (tolerance of + or - 5 cm) .

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 12,5 metres.


(2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.

Guide Rails and Corner irons

ACCESSORIES FOR STAINLESS STEEL SLATS

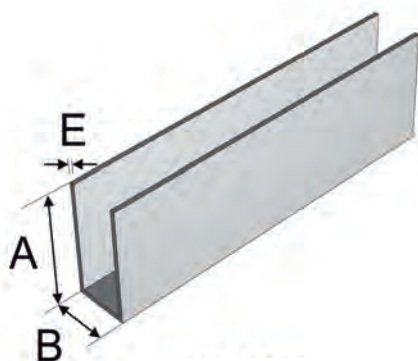

GUIDE RAILS

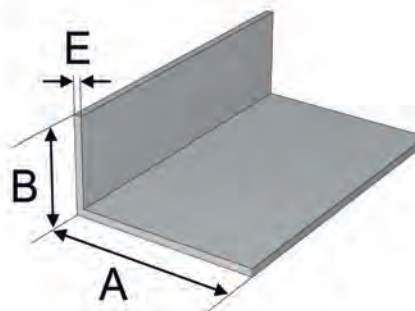

CORNER IRONS

REFERENCE	DESCRIPTION					WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	--	--	--	--	-----------------	---------------	-------------------	------------

Guide rail of stainless steel (316L) (AxBxAxE)

CLI0400	steel	stainless	40x22x40x1,5	1,5mm	1,12	LM	1	8,5 LM* (1)
CLI0600	steel	stainless	60x28x60x2	2,0mm	2,168	LM	1	8,5 LM* (1)

Corner iron made of stainless steel (316L) (AxBxAxE)

COI0600	steel	stainless	60x30x2	2,0mm	1,31	LM	1	8,5 LM* (1)
---------	-------	-----------	---------	-------	------	----	---	----------------


MAINTENANCE PROCEDURE FOR STAINLESS STEEL

Prior to installing stainless steel profiled materials (slats, bottom slats, guide Rails, corner irons, etc.), it is greatly recommended to subject them to PASSIVATION i.e. stainless steel surfaces must be treated and maintained by regular cleaning with appropriate products.

* Length in stock (tolerance of + or - 5 cm) .

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 10 metres.

IP

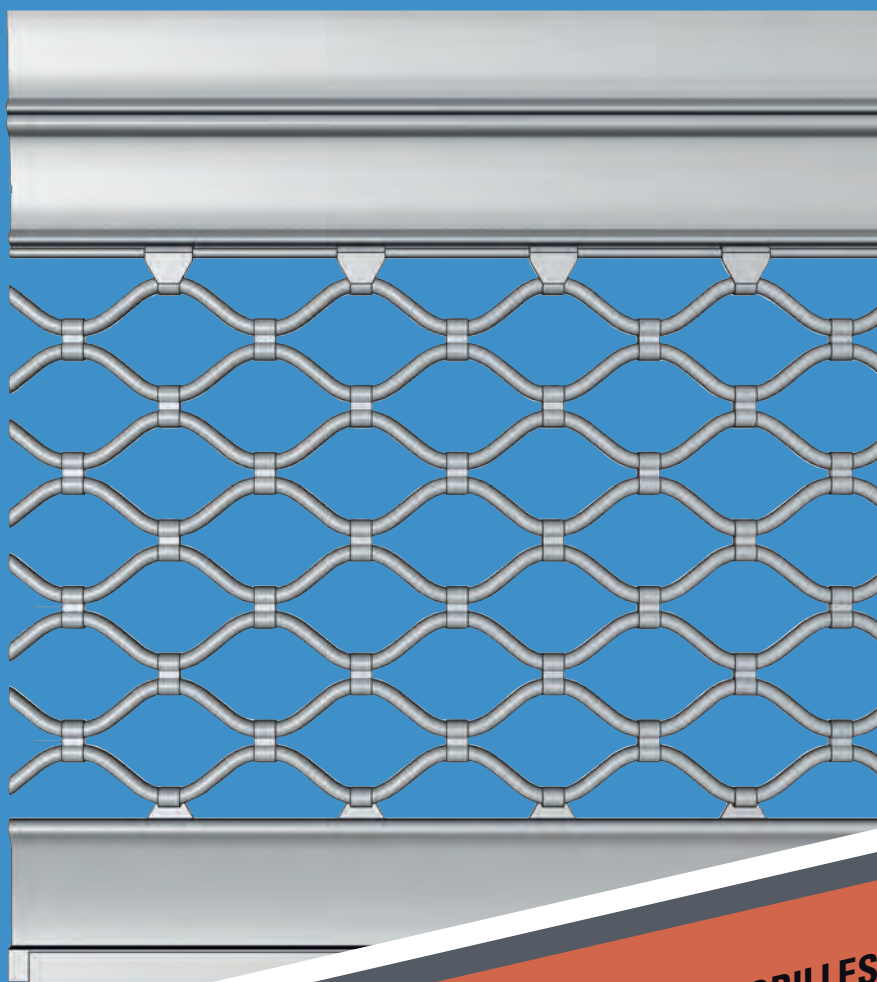


ROLLABLE GRILLES
CORRUGATED GRILLES
RECTANGULAR GRILLES


PROFILMAR

Rolling grilles and accessories

VISIS

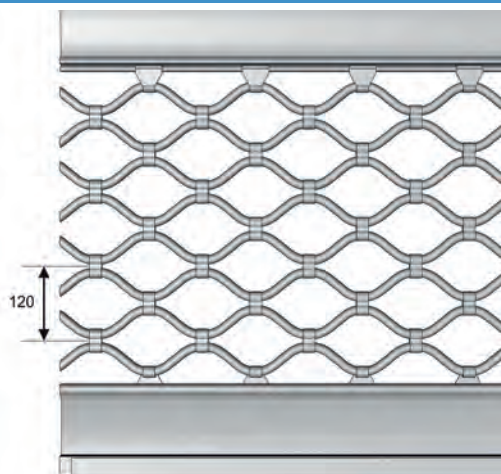

VITABS

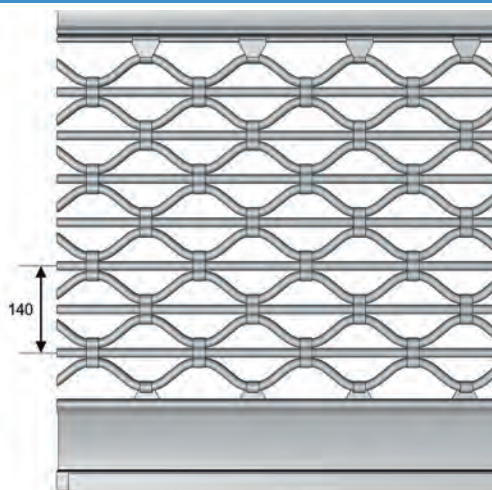

VITABR

REFERENCE	DESCRIPTION	WEIGHT KG/M ²	SALES UNIT	CONDITIONING
-----------	-------------	-----------------------------	---------------	--------------

Visis (width not exceeding 10.000 mm)


VITABS	Simple Visis panel (width not exceeding 10.000 mm) including high and low fasteners	11	M ²	
VITABR	Reinforced Visis panel (width not exceeding 10.000 mm) including high and low fasteners	15	M ²	

Visis (width exceeding 10.000 mm)

VITABS-LARGE	Simple Visis panel (width exceeding 10.000 mm) including high and low fasteners	11	M ²	
VITABR-LARGE	Reinforced Visis panel (width exceeding 10.000 mm) including high and low fasteners	15	M ²	

Rolling grilles and accessories

TUBES FOR ROLLING GRILLES

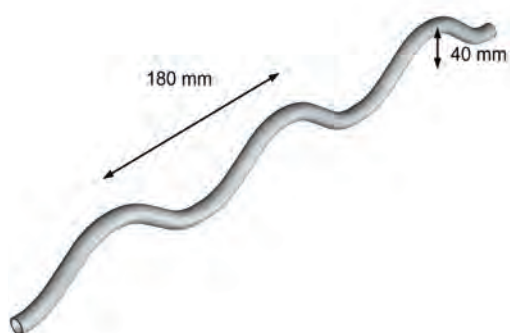

REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDI- TIONING	BAR LENGTH
-----------	-------------	-----------------	---------------	-------------------	---------------

Tubes for VISIS / AERO rolling grilles

TOO0140	Galvanised corrugated tube (14x1.1)	0,40	LM	100	11,40 LM
TOO0141	Galvanised corrugated tube (14x1.1)	0,40	LM	100	9,70 LM
TOO0140_5.7	Galvanised corrugated tube (14x1.1)	0,40	LM	100	5,70 LM*
TOD0140	Galvanised straight tube (14x1.1)	0,36	LM	250	13,00 LM*
TOD0141	Galvanised straight tube (14x1.1)	0,36	LM	250	11,00 LM*
TOD0180	Straight tube made of galvanised steel (18x1.0)	0,40	LM	100	7,5

* Length in stock (tolerance of + or - 5 cm) .

((2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.



PROFILMAR

Rolling grilles and accessories

ACCESSORIES FOR VISIS



VIATHB14



VIAT12S



VIAT20M



VIAT20S



VIAT20R



VIAT10L

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------


Tubes for rolling grilles

VIATHB14	High and low galvanised fastener for a diameter 14 tube (tube-slat connection)	2,0mm	0,049	U	250 (3)
VIAT12S	Simple galvanised Visis fastener	1,2mm	0,028	U	1250 (3)
VIAT20M	Simple galvanised straight Visis fastener	2,0mm	0,032	U	500 (3)
VIAT20S	galvanised folded Visis fastener	2,0mm	0.032	U	500 (3)
VIAT20R	galvanised reinforced Visis fastener	2,0mm	0.037	U	350 (3)


(3) Possibility to order exact quantities. However, price conditions could change.

Rolling grilles and accessories


AERO

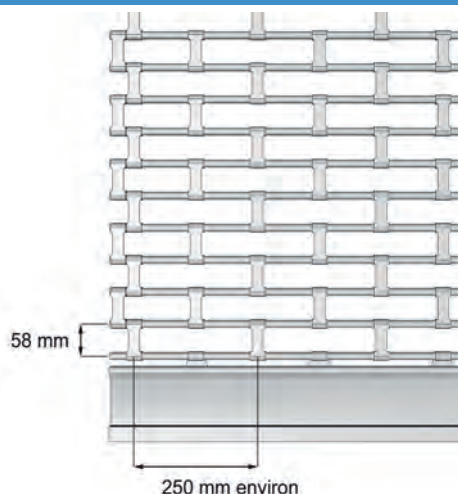

RRTAB058

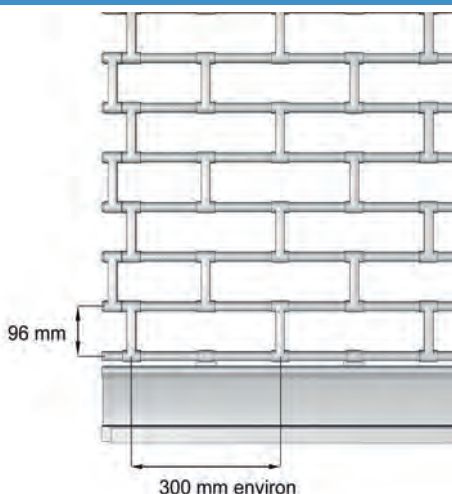

RRTAB096

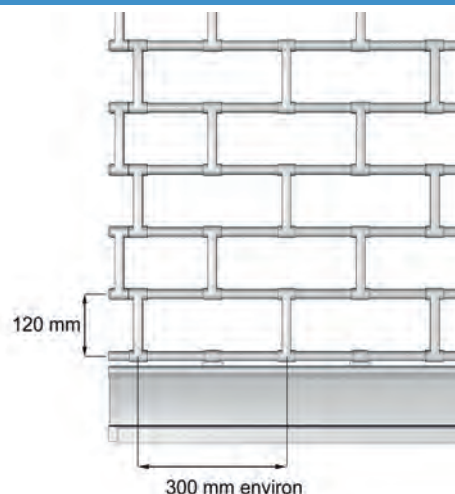

RRTAB120

REFERENCE	DESCRIPTION	WEIGHT KG/M ²	SALES UNIT	CONDITIONING
-----------	-------------	-----------------------------	---------------	--------------

AÉRO

RRTAB058	Rectangular panel (AÉRO) comprising stub axles (clearance 58) for Ø14 tubes (spaced out around every 250 mm) including high and low fasteners	11,6	M ²	
RRTAB096	Rectangular panel (AÉRO) comprising stub axles (clearance 96) for Ø18 tubes (spaced out around every 300 mm) including high and low fasteners	8,3	M ²	
RRTAB120	Rectangular panel (AÉRO) comprising stub axles (clearance 120) for Ø18 tubes (spaced out around every 300 mm) including high and low fasteners	5,7	M ²	

* if width > 7.500 mm, please refer to us for a specific study

Rolling grilles and accessories

ACCESSORIES FOR AERO



VIATHB14
VIATHB18



RRBI058



RRBI096



RRBI120

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Accessories for AÉRO

VIATHB14	High and low fastener for diameter 1 tubes	2,0mm	0,049	U	250 (3)
VIATHB18	High and low fastener for diameter 18 tubes	2,0mm	0,057	U	200 (3)
RRBI058	Stub axle made of galvanised steel for diameter 14 tubes (clearance 58)	2,0mm	0,06	U	100 (3)
RRBI096	Stub axle made of galvanised steel for diameter 18 tubes (clearance 96)	1,5mm	0,11	U	100 (3)
RRBI120	Stub axle made of galvanised steel for diameter 18 tubes (clearance 20)	1,0mm	0,07	U	100 (3)

(3) Possibility to order exact quantities. However, price conditions could change.

Notes



PROFILIGHT
transparent security roller shutter

PROFILIGHT

transparent security roller shutter

PROFILIGHT is a modern and innovative roller shutter. Transparent and with an absolute security, it allows to enhance and secure at best the shop windows.

With its transparency, **PROFILIGHT** increases commercial exposure of all shop windows and allows to restore hundred percent space when opened. Its transparent modules and the eventual laquerage of the aluminium slats, multiply the architectural views in lot of domains.

In order to be present in the whole lines of business, we have developed 3 varieties of this product:



PROFILIGHT HOME: verandas, pool houses, sun rooms, terraces, outdoor kiosks...



PROFILIGHT SOLID: shops, fast foods, restaurants, hotels, banks, pharmacies, industrial premises...




PROFILIGHT GLASS: big structures, airports, malls, industries...



TECHNICALS DETAILS





Specific profiles in order to liaise with traditional locks and axis of roller shutters
It allows the use of regular motorisations of all brands and types of roller shutters (wired, radio, domotic...)



High resistance polycarbonate transparent modules. (anti-UV, anti-yellowing, lg=600mm, ep=3).

Shutter with optimised design in order to obtain the most reduced-encumbrance winding system of the market and to be used in the regular guide rails and boxes of the roller shutter.

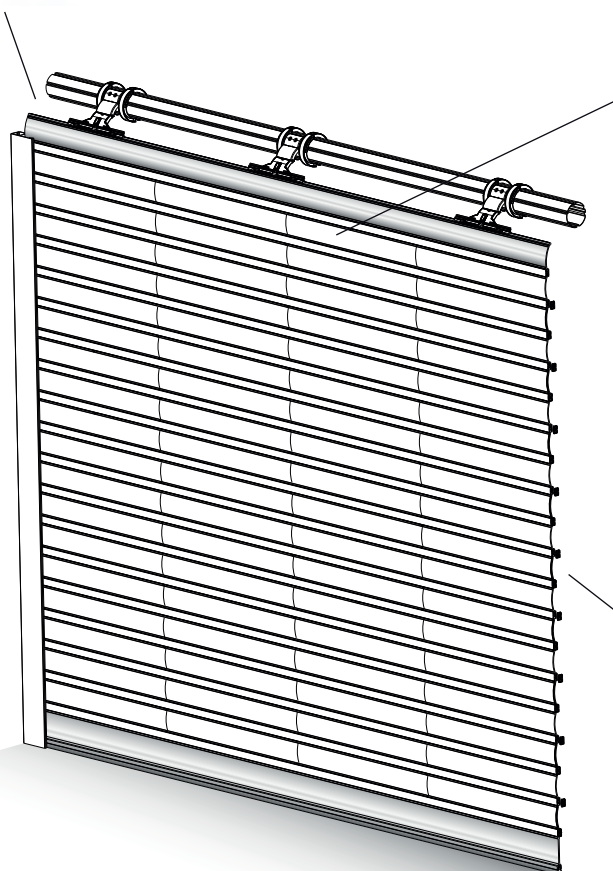

Various choices of lacquered aluminium profiles.

Specific seals and nozzles providing quiet operation.

PROFILIGHT

transparent security roller shutter

home

PROFILIGHT HOME is the perfect solution to enhance safety, visual, a high energy efficiency of houses and cafe terraces with full transparency.

PROFILIGHT HOME's conception allows a reduced-encumbrance winding system, to run silently, a high wind resistance and an easiest installation.

PROFILIGHT HOME can be completely transparent or partially (with the addition of aluminium curtain blades).

DIMENSIONS DETAILS

Max lenght	5000 mm
Max high	4500 mm
Max surface	17 m ²
Available Lacquering	yes
Wheight / m ²	8,7 Kg/m ²
Slat pitch	100 mm
Winding diameter (For 2500mm height ⁽¹⁾)	250 mm
Mini diameter tube	Tube ZF80 + bague ø100mm ⁽²⁾

⁽¹⁾ See winding tables

⁽²⁾ Or similar system

MARKETING

- IN SPARE PARTS TO BE FITTED BY THE CUSTOMER
- CUSTOMIZED CURTAIN



Qualicoat certified lacquering offers durability and aesthetics in the outside environment.

Request the complete sales leaflet for more information.

CERTIFICATIONS



Fire

M2
ULVO

Intrusion

CR3

Wind

C4
C5

INSTALLATION SITES



RESIDENTIAL
(technical constraints)



SHOPS
(Shops, banks...)



RESTAURANTS
(technical constraints)





DOM-TOM
(technical constraints)



TECHNICALS DETAILS

Specific rails to hang the shutter to the regular slats of the metallic roller shutters.

It allows the use of all brand and type of motorised axis (central, tubular, lateral side...)

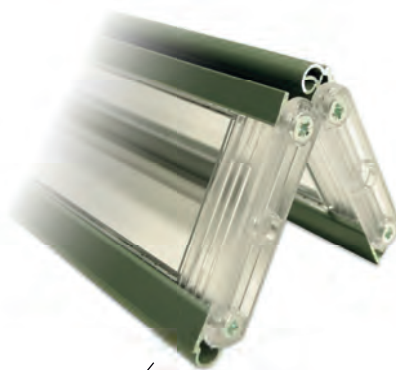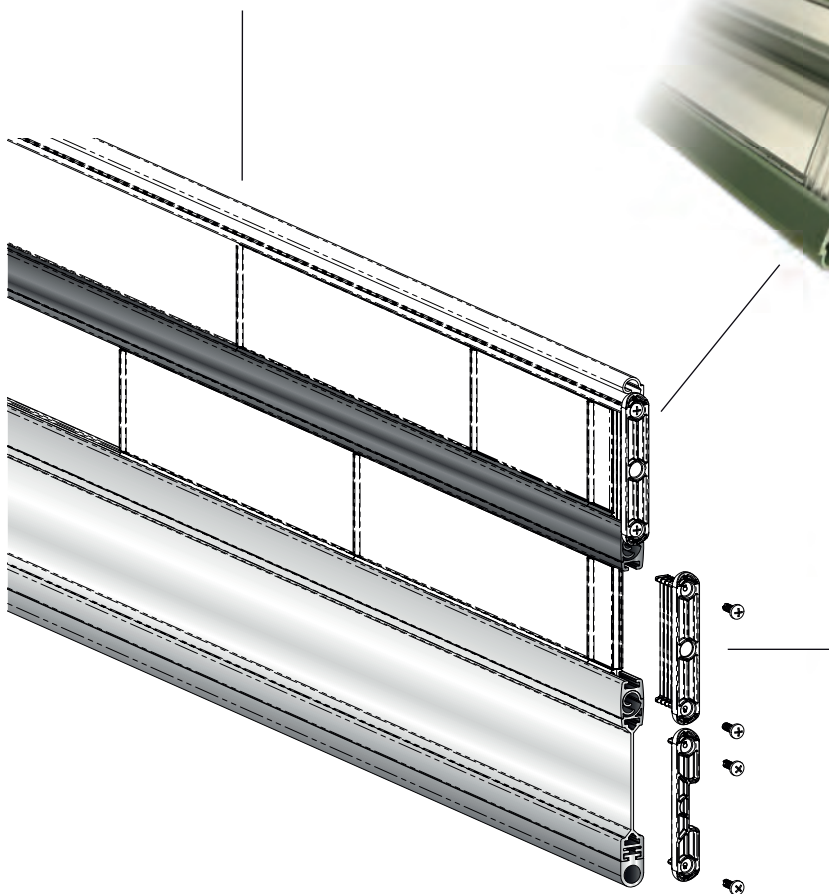

High resistance polycarbonate transparent modules. (anti-UV, anti-yellowing, Ig=300mm, ep=21).

Shutter with optimised rails and reinforcement allowing an unequalled rigidity.



Bottom rail of specific liaising allowing the establishment of all the aluminium, steel or High resistance polycarbonate bottom slats

PROFILIGHT

transparent security roller shutter

solid

PROFILIGHT SOLID is the perfect solution to enhance safety, visual, commercial establishment expositions, houses, industries and high-risk sites such banks, airports... with transparency.

PROFILIGHT SOLID's conception allows to obtain very strong shutters, a high wind resistance and a CR3 level of intrusion security.

PROFILIGHT SOLID is also available in spare parts for a self-assembly or assembled with desired dimensions.

DIMENSIONS DETAILS

Max lenght	7000 mm
Max high	8000 mm
Max surface	40 m ²
Available Lacquering	yes
Wheight / m ²	10,5 Kg/m ²
Slat pitch	107 mm
Winding diameter (For 2500mm height and mini tube)	310 mm
Mini diameter tube	133 mm
Running in the roller shutter box	yes

MARKETING

PROFILIGHT SOLID's shutter can be integrated in metal shutter environment :

- Manual or motorised (central, tubular or on lateral side)
- Steel or Aluminium guide Rails

Depending dimensions, it can be integrated in roller shutter environment :

- Regular roller shutter box
- Regular roller shutter motor
- Regular aluminium guide rails

CERTIFICATIONS



Fire

M2

Intrusion

CR3


Wind

C4

C5


In progress

INSTALLATION SITES



SHOPS

(Shop, bank...)



RESIDENTIAL

(technical constraints)



RESTAURANTS

(technical constraints)




INDUSTRIES

To download our technical files, visit

PROFILMAR S.A.S. www.profilmar.fr




TECHNICALS DETAILS




Specific attachments to hang the shutter to the regular slats of the metallic roller shutters.

It allows the use of all brand and type of motorised axis (central, tubular, lateral side...).



High resistance polycarbonate transparent modules. (anti-UV, anti-yellowing, lg=640mm, ep=34)

Shutter with optimised resistance in order to obtain large dimensions.

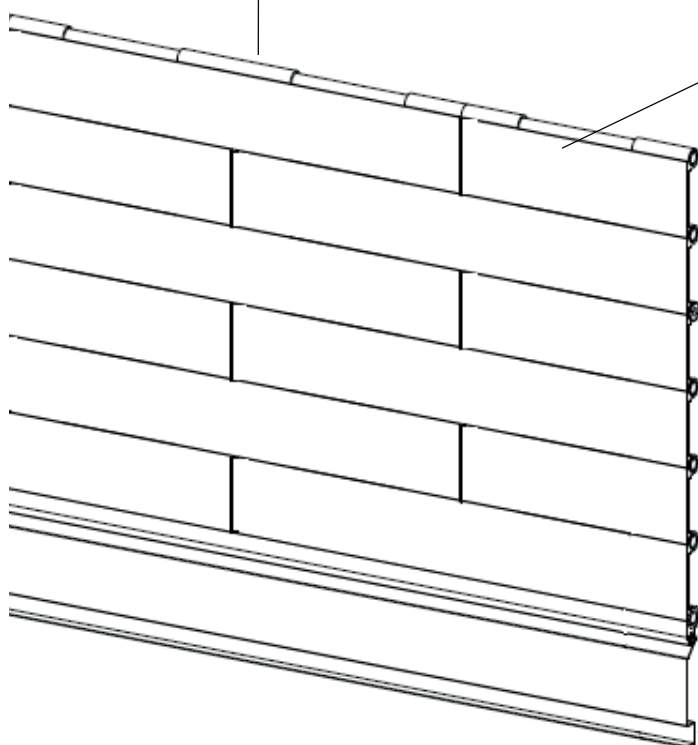

Invisible and possible integration of system of protection against intrusions made by grinders **PROFILBLOCK**.

Bottom rail of specific liaising allowing the establishment of all the aluminium or steel bottom slats.

PROFILIGHT

transparent security roller shutter

glass

PROFILIGHT GLASS is the perfect solution to enhance safety, visual, commercial establishment expositions, houses, industries and high-risk sites such banks, airports... with transparency.

PROFILIGHT GLASS's conception allows to obtain shutters with big surfaces, to run silently, a high wind resistance and an effective intrusion security using the integration of the **PROFILBLOCK** (CR4).

PROFILIGHT GLASS can be completely transparent or partially (with the addition of metal curtain blades).

DIMENSIONS DETAILS

Max lenght	12000 mm
Max high	8000 mm
Max surface	72 m ²
Available Lacquering	Bottom Slat & guide rails
Wheight / m ²	10 Kg/m ²
Slat pitch	100 mm
Winding diameter (For 2500mm height ⁽¹⁾)	350 mm

⁽¹⁾ See winding tables

MARKETING

- IN SPARE PARTS TO BE FITTED BY THE CUSTOMER
- CUSTOMIZED CURTAIN



Qualicoat certified lacquering offers durability and aesthetics in the outside environment.

Request the complete sales leaflet for more information.

CERTIFICATIONS



INSTALLATION SITES



MALLS
(Shops, bank...)



INDUSTRIES




AEROPORTS



BANKS

Notes

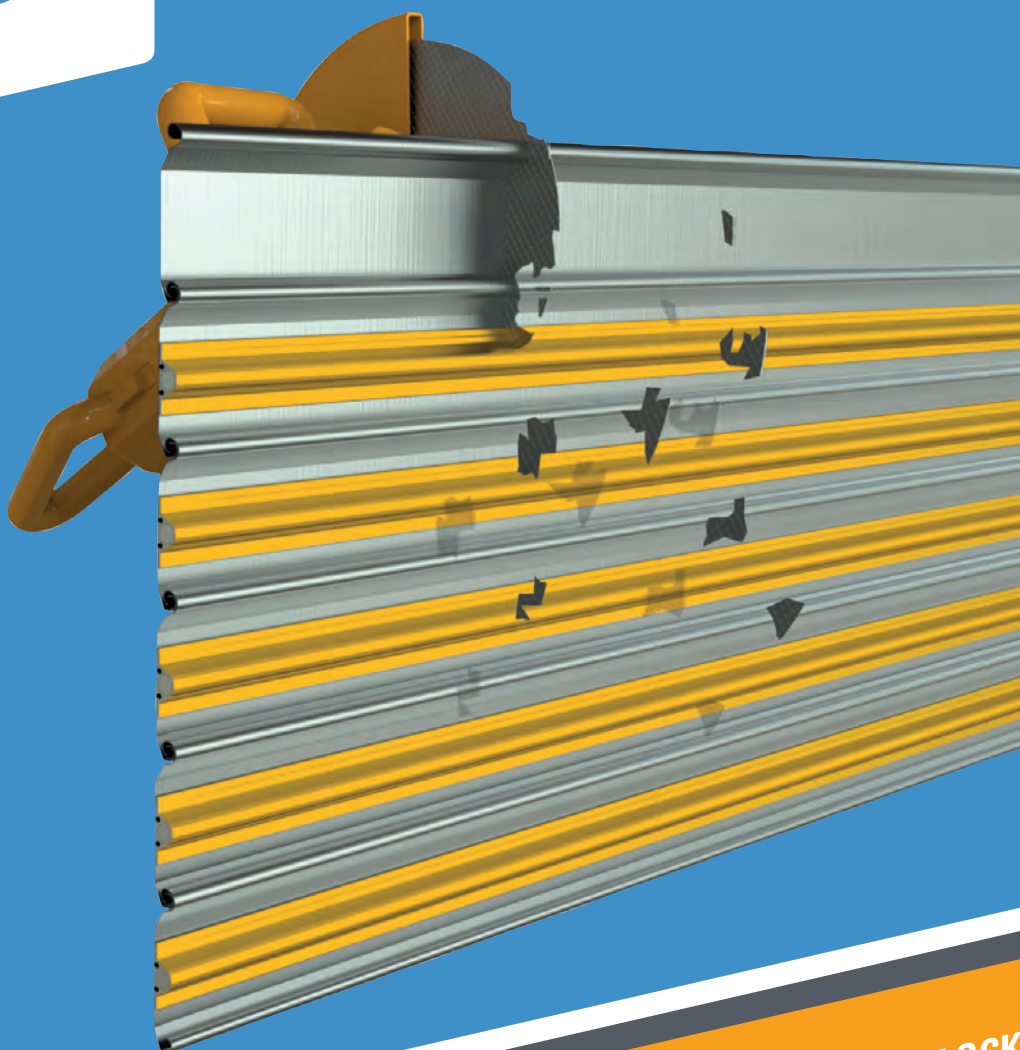


PROFILBLOCK
PROTECTION ARMOUR AGAINST
BURGLARY ATTEMPTS


PROFILMAR

Additional security shield

PROFILBLOCK

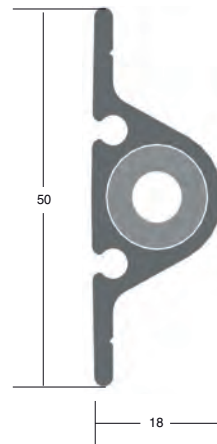

REFERENCE	DESCRIPTION	WEIGHT KG/LM	POIDS KG/M ²	SALES UNIT	CONDITIO- NING	BAR LENGTH
PROFILBLOCK						
PBLOCK_FIXRIVET	Profilblock - additional security shield + Fixed by Rivets (maximum length: 7000 mm)	0,98		ML	1	(2)

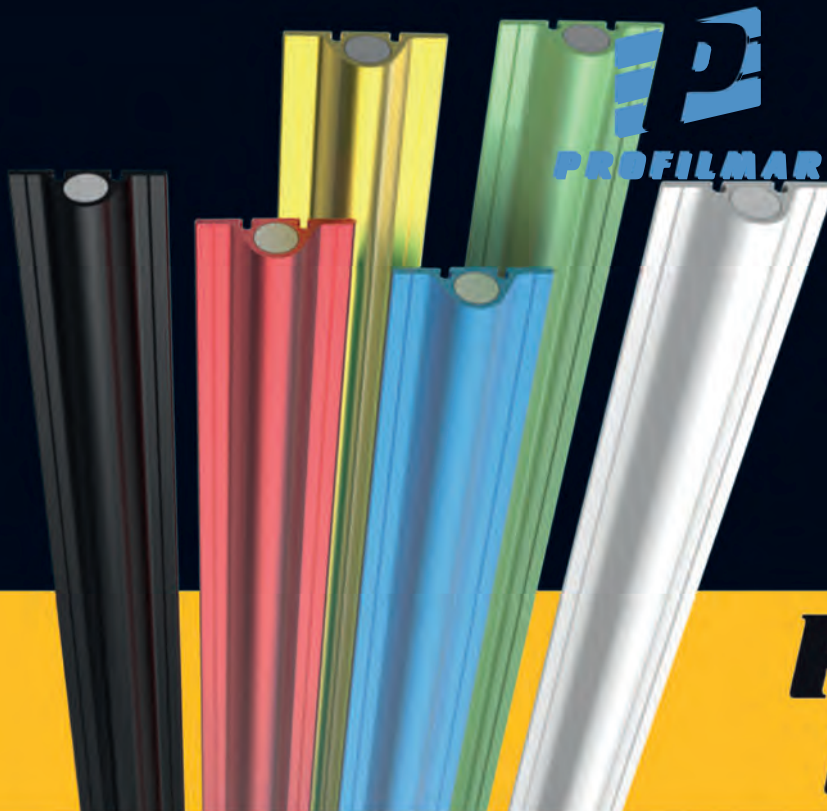


PROFIL BLOCK®

REINFORCE YOUR ROLLER DOORS WITH A TOP OF THE RANGE PROTECTION SHIELD AGAINST HEAVY BURGLARIES

PROFILBLOCK is an additional security shield against burglaries with portable cutting equipment.

In reinforced aluminium, this innovative system, light and robust, neutralizes any attempt to cut the roller door equipped with PROFILBLOCK.

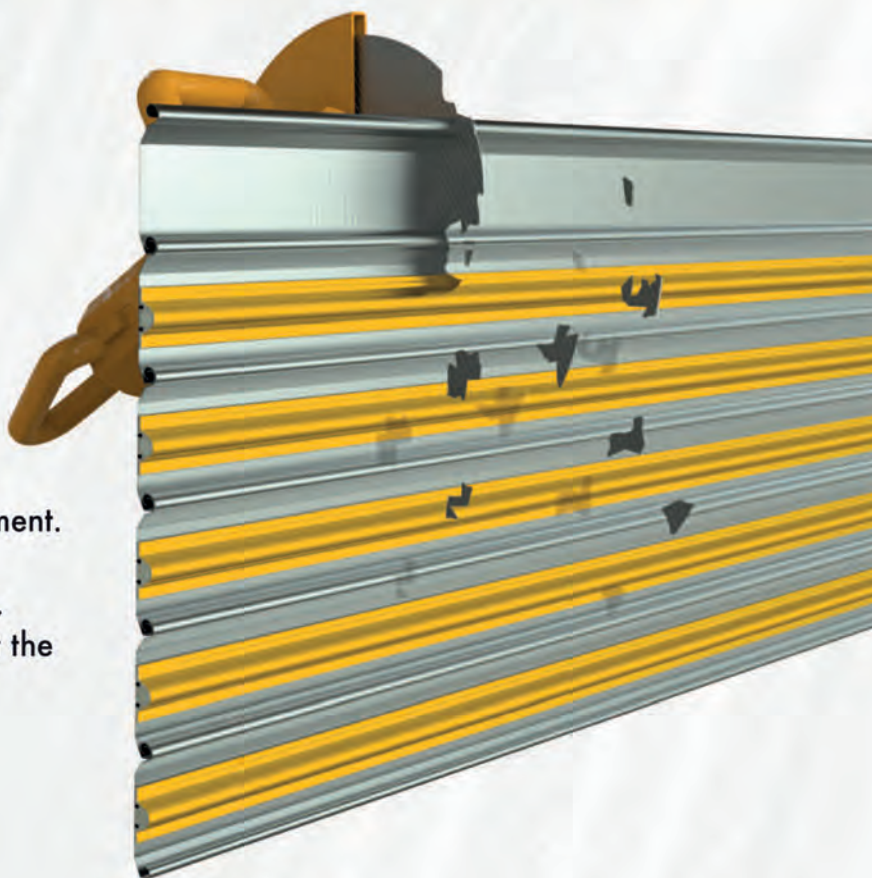

INNOVATIVE CHARACTERISTICS



patented blocking system against any cutting equipment



Taylor-made, ready-to-install, without modifying the existing installations




Compatible with all the shutters, partitions and fences



Quick and easy to install, can be stuck or fixed with rivets or bolts or welded



PROFILMAR, first partner of the metal roller door manufacturers

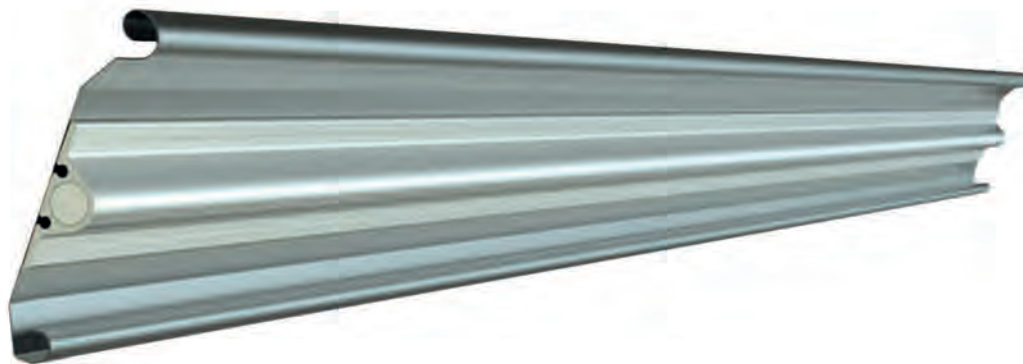

4 QUESTIONS TO UNDERSTAND PROFILBLOCK

• Why ?

Usually, on standard shutters, the protection from usual burglaries with simple equipment is enough.

PROFILBLOCK® dramatically stops the burglars using portable metal cutting equipment.

• For whom ?

For any person or company looking for an optimal protection, personal as well as professional.

• How ?

PROFILBLOCK can be fixed on any existing installation. Its tailor-made manufacturing allows a high flexibility, whatever are the sizes or types of doors, shutters or fences.

PROFILBLOCK is THE solution for :

- Rolling doors
- Armoured doors / Swing doors
- Sectional doors
- Fences / Partitions / Cladding
- Roller shutters
- Garage doors

Which reliability ?

Two years of tests and R&D proved that PROFILBLOCK clearly is the most efficient solution against attacks with :

- Portable angle grinder
- Metal saw
- Straight Grinder
- Sabre saw

CERTIFICATIONS - STANDARDS - PATENTS

The PROFILBLOCK solution is in total compliance with the current standards.

Its system stops or delays the level 4 attacks, as defined by the European standards, i.e. by the means of heavy power tools (drill, jig-saw, sabre saw, angle grinder)



PROFILMAR (ZAC La Valentine)
4 montée du commandant Robien
13011 Marseille




info@profilmar.fr



+33 (0) 4 91 87 97 97

Notes

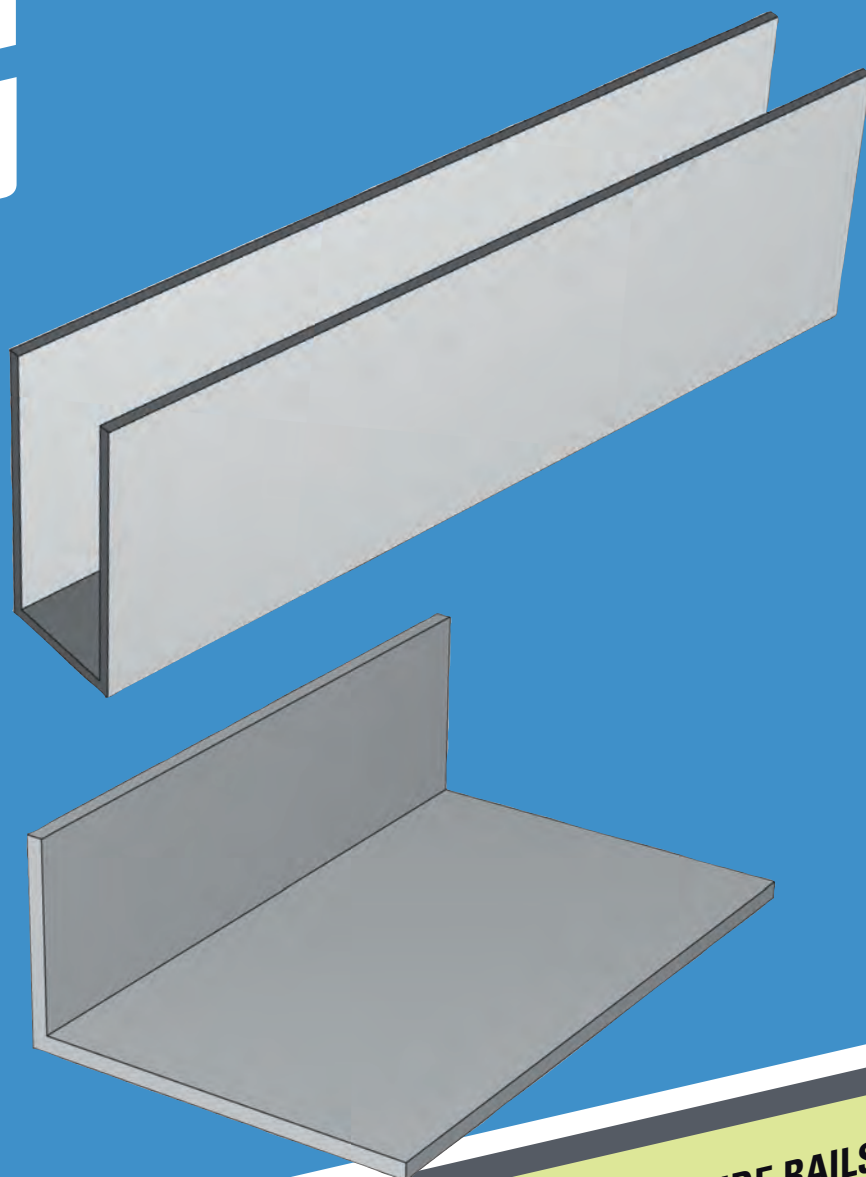

**GUIDE RAILS AND ACCESSORIES FOR GUIDE RAILS
AND CORNER IRONS**
SIMPLE CORNER IRONS AND ACCESSORIES
ANTI-FALL AND ACCESSORIES


PROFILMAR



PROFILMAR

Guide Rails and Corner irons

GUIDE RAILS (part 1/2)

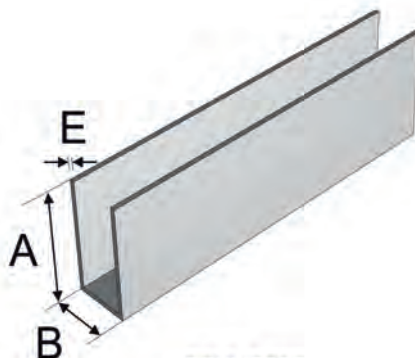

GUIDE RAILS


REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
Lateral guide Rails made of galvanised steel (A x B x A x E)					
CLG0402	40 x 22 x 40 x 2	1,50	LM	1	8,5 LM* (1)
CLG0403	40 x 26 x 40 x 2	1,56	LM	1	8,5 LM* (1)
CLG0404S	40 x 28 x 40 x 2	1,60	LM	Please refer to us	8,5 LM* (1)
CLG0404	40 x 30 x 40 x 2	1,60	LM	1	8,5 LM* (1)
CLG0500	50 x 26 x 50 x 2	1,85	LM	1	8,5 LM* (1)
CLG0501	50 x 26 x 50 x 2,5	2,40	LM	1	8,5 LM* (1)
CLG0502S	50 x 28 x 50 x 2	1,88	LM	Please refer to us	8,5 LM* (1)
CLG0502	50 x 30 x 50 x 2	1,88	LM	1	8,5 LM* (1)
CLG0503S	50 x 28 x 50 x 2,5	2,40	LM	Please refer to us	8,5 LM* (1)
CLG0503	50 x 30 x 50 x 2,5	2,40	LM	1	8,5 LM* (1)

* Length in stock (tolerance of + or - 5 cm) .

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 10 metres.

Guide Rails and Corner irons

GUIDE RAILS (part 2/2)

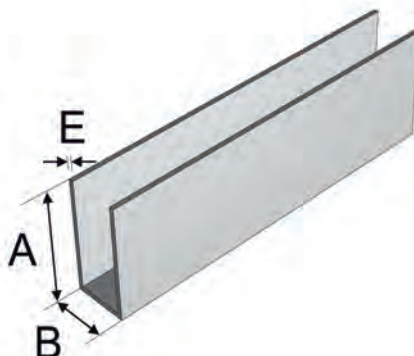

REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	-----------------	---------------	-------------------	------------

Lateral guide Rails made of galvanised steel (A x B x A x E)

CLG0580	58 x 33 x 58 x 2,5	2,78	LM	1	8,5 LM* (1)
CLG0601S	60 x 28 x 60 x 2,5	2,78	LM	Please refer to us	8,5 LM* (1)
CLG0601	60 x 30 x 60 x 2,5	2,78	LM	1	8,5 LM* (1)
CLG0602	60 x 35 x 60 x 2,5	2,90	LM	Please refer to us	8,5 LM* (1)
CLG0700	70 x 30 x 70 x 2,5	3,18	LM	1	8,5 LM* (1)
CLG0701	70 x 33 x 70 x 3,0	4,08	LM	1	8,5 LM* (1)
CLG0780	78 x 33 x 78 x 2,5	3,58	LM	1	8,5 LM* (1)
CLG0800	80 x 30 x 80 x 2,5	3,58	LM	1	8,5 LM* (1)
CLG0980	98 x 33 x 98 x 2,5	4,38	LM	1	8,5 LM* (1)
CLG1000	100 x 30 x 100 x 2,5	4,38	LM	1	8,5 LM* (1)

Lateral guide Rails made of ral 9010 white pre-lacquered steel (A x B x A x E)

CLB0400	40 x 20 x 40 x 1,5	1,10	LM	1	8,5 LM* (1)
---------	--------------------	------	----	---	-------------

Lateral guide Rails made of stainless steel (316L) (A x B x A x E)

CLI0400	40 x 22 x 40 x 1,5	1,12	LM	1	8,5 LM* (1)
CLI0600	60 x 28 x 60 x 2	2,168	LM	1	8,5 LM* (1)

* Length in stock (tolerance of + or - 5 cm) .

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 10 metres.

Guide Rails and Corner irons

ACCESSORIES FOR GUIDE RAILS (part 1/2)



CLACJO00



CLACJO01



CLACJO03




CLACPM00



CLACPM01



CLACPM02



CLACPM03

REFERENCE	DESCRIPTION	WEIGHT KG/LM or KG/U	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	----------------------------	---------------	-------------------	------------

Accessories for guide Rails

CLACJO00	Seal for a special guide rail (ref: CLS0600) for P112, P107 and P80 double-walled slat.	0,150	LM	10	6 LM*
CLACJO01	Wiper seal for a special guide rail (ref: CLS0600) for P100 and P116 slat.	0,150	LM	10	6 LM*
CLACJO03	weatherseal for all simple guide Rails	0,142	LM	10	6 LM*
CLACPM00	Guide rail Invitation Length: 40mm Thickness: 2mm	0,05	U	100	
CLACPM01	Lock cover	0,06	U	100	
CLACPM02	Guide rail stop	0,08	U	100	
CLACPM03	Corner iron for fastening the guide rail	0,075	U	150	

* Length in stock (tolerance of + or - 5 cm) .


(3) Possibility to order exact quantities. However, price conditions could change.



PROFILMAR

Guide Rails and Corner irons

ACCESSORIES FOR GUIDE RAILS (part 2/2)

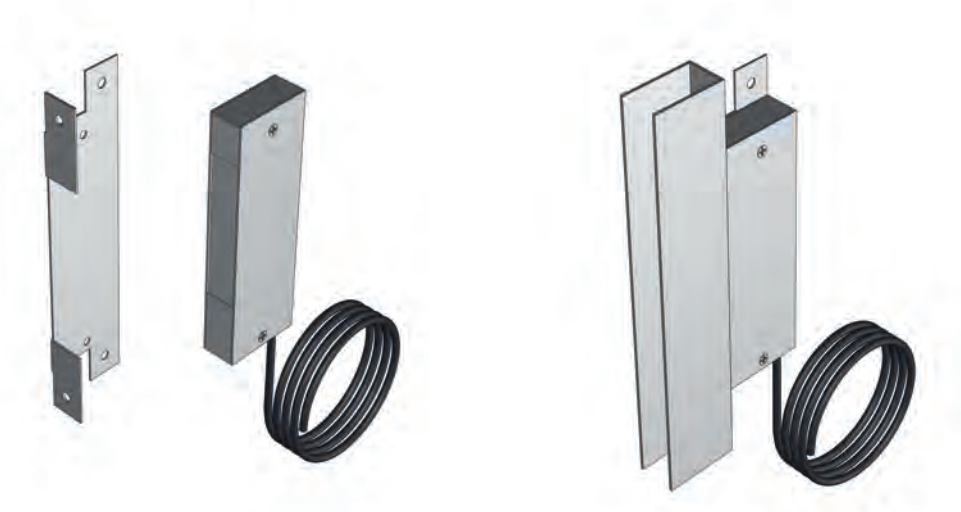

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Accessories for guide Rails

MACTS00	Electrical contact for lock shank	0,455	U	20
---------	-----------------------------------	-------	---	----

(3) Possibility to order exact quantities. However, price conditions could change.

Guide Rails and Corner irons

ANTI-NOISE GUIDE RAIL (60x50x38x2)



REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	-----------------	---------------	-------------------	------------

Anti-noise guide rail (60x50x38x2) for double-walled slats

CLS0600	steel galvanised	2,0mm	3,07	LM	1	8,5 LM* or (1)
---------	------------------	-------	------	----	---	----------------

Seals for guide rails (60x50x38x2)

CLACJO00	Seal for guide rail ref. CLS0600 for double-walled P 112 slat inside surface	0,15	LM	10	6 LM*
CLACJO01	Wiper seal for guide rail ref. CLS0600 for doubled-wall P 112 slat outside surface	0,16	LM	10	6 LM*

* Length in stock (tolerance of + or - 5 cm) .


(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning; between 5 and 10 metres.



PROFILMAR

Guide Rails and Corner irons


ANTI-STORM GUIDE RAILS

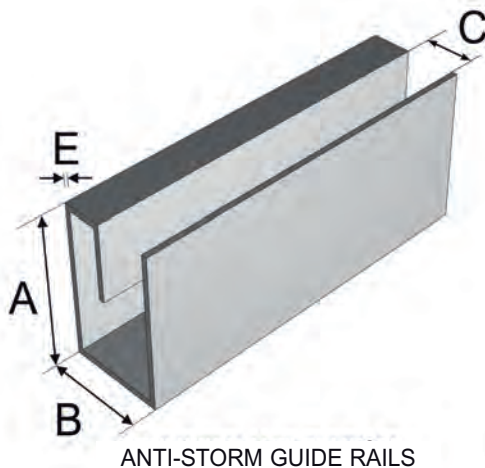


REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	-----------------	---------------	-------------------	------------

Anti-storm guide rails made of galvanised steel (A x B x A x C x E)

CLT0600	60 x 50 x 60 x 25 x 2,5	4,043	LM	1	6 ML*
CLT0800	80 x 53 x 80 x 28 x 3	5,982	LM	1	6 ML*
CLT0800_7	80 x 53 x 80 x 28 x 3	5,982	LM	1	7 ML*
CLT1200	120 x 53 x 120 x 28 x 3	7,866	LM	1	6 ML*

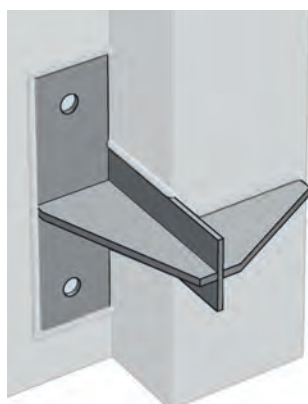

CLTACEF

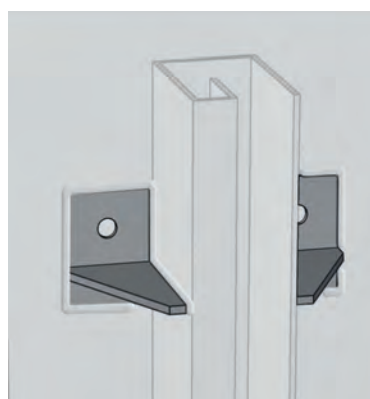

CLTACEM

Anti-storm guide rail strengthening

CLTACEF	AT80 guide rail strengthening for front-fitting thickness: 4 mm	0,310	U	1	
CLTACEM	AT80 guide rail strengthening for fitting between walls thickness: 4 mm	5,982	U	1	


* Length in stock (tolerance of + or - 5 cm) .




PROFILMAR

Guide Rails and Corner irons


WINDLOCK

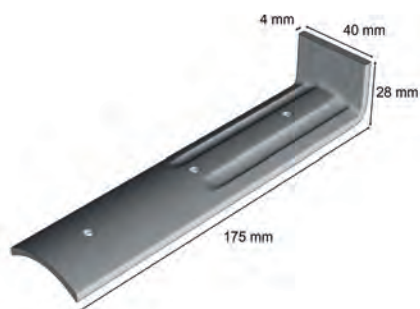

LACCT8

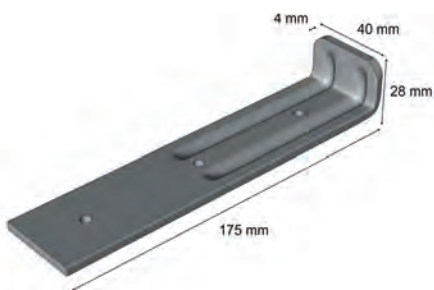

LACCT06

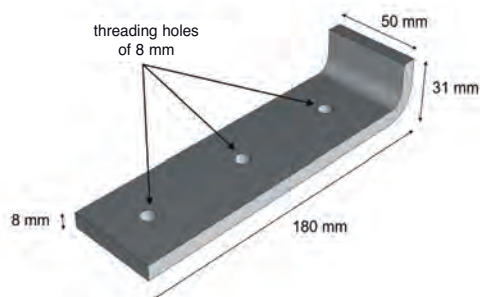

LACCTR

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	----------------	---------------	-------------------	------------

Anti-storm hooks made of galvanised steel for anti-storm guide Rails

LACCT8	Windlock for P80 slat thickness: 4 mm	0,25	U	50	
LACCT06	Windlock for P100 and P116 slat thickness: 4 mm	0,25	U	50	
LACCTR	Reinforced windlock For P100, P107 P116 slats thickness: 8 mm	0,6	U	1 (3)	


(3) Possibility to order exact quantities. However, price conditions could change.



PROFILMAR

Guide Rails and Corner irons

CORNER IRONS

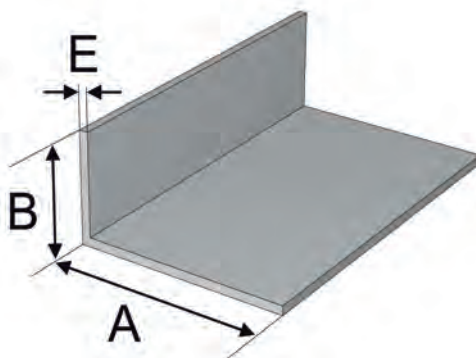

GUIDE RAILS

REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	-----------------	---------------	-------------------	---------------

Corner irons made of galvanised steel (AxBxE)

COG0300	30 x 30 x 3	1,26	LM	1	8,5 LM* (1)
COG0500	50 x 30 x 3	1,73	LM	1	8,5 LM* (1)
COG0600	60 x 30 x 3	1,96	LM	1	8,5 LM* (1)

Corner irons made of stainless steel (316L) (AxBxE)

COI0600	60 x 30 x 2	1,31	LM	1	8,5 LM* (1)
---------	-------------	------	----	---	----------------

* Length in stock (tolerance of + or - 5 cm) .

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 10 metres.

IP



**ACCESSORIES FOR METAL SHUTTERS
AND ROLLABLE GRILLES**
SIMPLE SPRING BOXES
ANTI-FALL SPRING BOXES
ACCESSORIES FOR SPRING BOXES
VARIOUS ACCESSORIES

PROFILMAR

Spring boxes and accessories

SIMPLE SPRING BOXES



XLSN

REFERENCE	DESCRIPTION	WEIGHT KG/U	SPRING (min. and max. width)	SALES UNIT	CONDITIONING
-----------	-------------	----------------	------------------------------------	---------------	--------------

Simple spring boxes

XLSN2046	200 x 48 x 60	0,91	50-60	1	200 (3)
XLSN2048	200 x 48 x 80	1,01	70-80	1	200 (3)
XLSN2066	200 x 60 x 60	0,91	50-60	1	200 (3)
XLSN2068	200 x 60 x 80	1,01	70-80	1	200 (3)
XLSN2246	220 x 48 x 60	1,02	50-60	1	200 (3)
XLSN2248	220 x 48 x 80	1,12	70-80	1	200 (3)
XLSN2266	220 x 60 x 60	1,02	50-60	1	200 (3)
XLSN2268	220 x 60 x 80	1,12	70-80	1	200 (3)
XLSN2476	240 x 76 x 60	1,12	50-60	1	200 (3)
XLSN2478	240 x 76 x 80	1,22	70-80	1	200 (3)

(3) Possibility to order exact quantities. However, price conditions could change.

Notes

Spring boxes and accessories

SAFETY KITS FOR SPRING BOXES



REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Safety kits for spring boxes

PROKIT2066	Safety kit for a 200 x 60 x 60 spring box	0,894	1	10
PROKIT2068	Safety kit for a 200 x 60 x 80 spring box	0,894	1	10
PROKIT2266	Safety kit for a 220 x 60 x 60 spring box	0,894	1	10
PROKIT2268	Safety kit for a 220 x 60 x 80 spring box	0,894	1	10
PROKIT2476	Safety kit for a 240 x 76 x 60 spring box	0,888	1	10
PROKIT2478	Safety kit for a 240 x 76 x 80 spring box	0,888	1	10



PROFILMAR

Springs in rolls

SPRINGS IN ROLLS (part 1/2 - stock available)



REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDITIONING
-----------	-------------	-----------------	---------------	--------------

Roller springs

XRR4010	40 x 1,0	on stock	0,31	Kg	1 roller
XRR4510	45 x 1,0	on stock	0,35	Kg	1 roller
XRR4514	45 x 1,4	on stock	0,49	Kg	1 roller
XRR5010	50 x 1,0	on stock	0,39	Kg	1 roller
XRR5011	50 x 1,1	on stock	0,43	Kg	1 roller
XRR5012	50 x 1,2	on stock	0,465	Kg	1 roller
XRR5013	50 x 1,3	on stock	0,505	Kg	1 roller
XRR5014	50 x 1,4	on stock	0,545	Kg	1 roller
XRR5512	55 x 1,2	on stock	0,515	Kg	1 roller
XRR5514	55 x 1,4	on stock	0,6	Kg	1 roller
XRR6010	60 x 1,0	on stock	0,46	Kg	1 roller
XRR6011	60 x 1,1	on stock	0,51	Kg	1 roller
XRR6012	60 x 1,2	on stock	0,56	Kg	1 roller
XRR6013	60 x 1,3	on stock	0,61	Kg	1 roller
XRR6014	60 x 1,4	on stock	0,65	Kg	1 roller
XRR6016	60 x 1,6	on stock	0,74	Kg	1 roller
XRR7012	70 x 1,2	on stock	0,66	Kg	1 roller
XRR7014	70 x 1,4	on stock	0,76	Kg	1 roller
XRR8012	80x 1,2	on stock	0,75	Kg	1 roller
XRR8014	80 x 1,4	on stock	0,87	Kg	1 roller

* Ordering the reference is possible. A minimum order of 500 Kg is required with a 10-week delivery time.



PROFILMAR

Springs in rolls

SPRINGS IN ROLLS (part 2/2 - to order)



REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDITIONING
-----------	-------------	-----------------	---------------	--------------

Roller springs

XRR5510	55 x 1,0	*	0,43	Kg	1 roller
XRR5511	55 x 1,1	*	0,471	Kg	1 roller
XRR5513	55 x 1,3	*	0,56	Kg	1 roller
XRR6512	65 x 1,2	*	0,61	Kg	1 roller
XRR6513	65 x 1,3	*	0,66	Kg	1 roller
XRR4011	40 x 1,1	*	0,34	Kg	1 roller
XRR4012	40 x 1,2	*	0,37	Kg	1 roller
XRR4013	40 x 1,3	*	0,407	Kg	1 roller
XRR4014	40 x 1,4	*	0,435	Kg	1 roller
XRR4511	45 x 1,1	*	0,385	Kg	1 roller
XRR4512	45 x 1,2	*	0,42	Kg	1 roller
XRR4513	45 x 1,3	*	0,455	Kg	1 roller

* Ordering the reference is possible. A minimum order of 500 Kg is required with a 10-week delivery time.

Spring boxes and accessories

ACCESSORIES FOR SPRING BOXES



XACAI55



XACAE55



PROTECTIVE FELT



Nylon ring
for spring boxes
(2 per box)

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Accessories for spring boxes

XACAI55	Spring box clip inside rolling up Length: 55 mm Thickness: 1.5	0,11	U	100
XACAE55	Spring box clip outside rolling up Length: 55 mm Thickness: 1.5	0,11	U	100
XACBN200	PROFILMAR Nylon Ring for diam. 200 spring boxes	0,02	U	250
XACBN220	PROFILMAR Nylon Ring for diam. 220 spring boxes	0,02	U	250 (3)
XACBN240	PROFILMAR Nylon Ring for diam. 240 spring boxes	0,02	U	250 (3)
XACGO00	Spring box pin	0,038	U	500
XACFEU10	Adhesive protective felt 194 pcs (Lg : 10 Ep : 3 mm) Lg : 200 mm	0,01	U	194 (3)

(3) Possibility to order exact quantities. However, price conditions could change.




PROFILMAR

Accessories for closing metal shutters

LOCKS (part 1/5)



LACSE00
LACSE01



LACSE90



LACSE02

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Locks

LACSE00	PROFILMAR type metal shutter lock with different keys (3 keys)	0,58	U	25 (3)
LACSE01	PROFILMAR type metal shutter lock with identical keys (3 keys)	0,58	U	25 (3)
LACSE90	Pair of mounting plates for metal shutter locks	0,06	U	50 (3)
LACSE02	PROFILMAR type blank for metal shutter locks	0,01	U	


(3) Possibility to order exact quantities. However, price conditions could change.




PROFILMAR

Accessories for closing metal shutters

LOCKS (part 2/5)

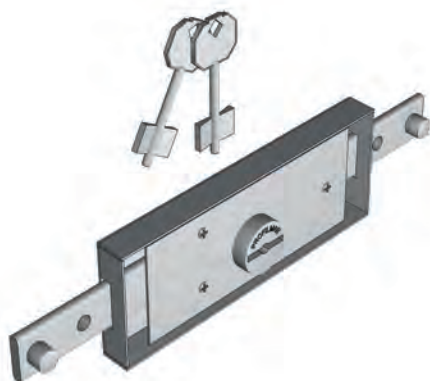

LACSE20
LACSE21



LACSE22

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Locks

LACSE20	Reinforced metal shutter lock with different keys (2 keys)	0,60	U	25 (3)
LACSE21	Reinforced metal shutter lock with identical keys (2 keys)	0,60	U	25 (3)
LACSE22	Blank for reinforced metal shutter lock	0,01	U	1


(3) Possibility to order exact quantities. However, price conditions could change.




PROFILMAR

Accessories for closing metal shutters

LOCKS (part 3/5)

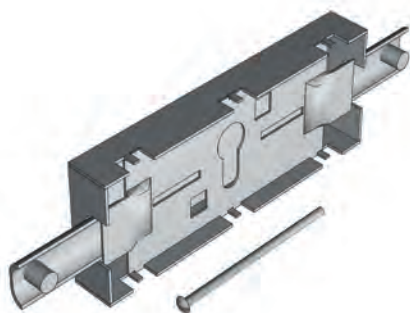

LACSE12



LACSE13



LACSE14

LACSE15

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------


Locks

LACSE12	Safe for European gun locks	0,50	U	25 (3)
LACSE13	Mounting plate for European gun locks	0,07	U	10 (3)
LACSE14	European gun half-cylinder different keys (3 keys)	0,10	U	10
LACSE15	European gun half-cylinder identical keys (3 keys)	0,10	U	10
LACSE16	Blank for European gun locks	0,01	U	1
LACSE17	Canon européen clé différente double entrée avec 2 clefs	0,280	U	10
LACSE18	Canon européen clé différente double entrée avec 2 clefs	0,280	U	10


(3) Possibility to order exact quantities. However, price conditions could change.

Accessories for closing metal shutters

LOCKS (part 4/5)

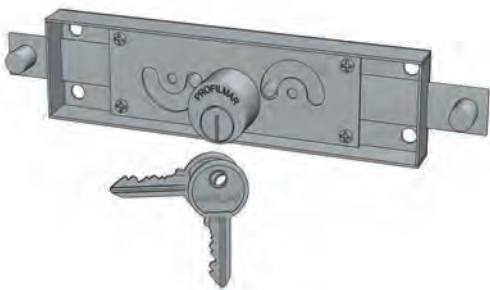

LACSE23

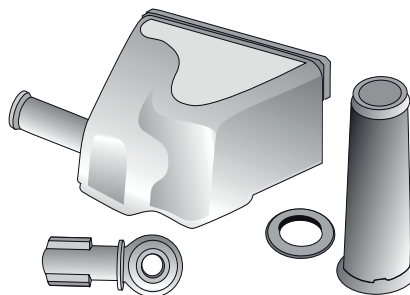

LFACSA00

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Locks

LACSE23	Small lock model for metal shutters different keys (2 keys)	0,385	U	25 (3)
LACSE24	Small lock model for metal shutters identical keys (2 keys)	0,385	U	25 (3)

Sabot VIRO

LFACSA00	SABOT VIRO 4218 CONDOR	1.940	U	
LACSE14	European gun half-cylinder different keys (3 keys)	0,10	U	10
LACSE15	European gun half-cylinder identical keys (3 keys)	0,10	U	25

(3) Possibility to order exact quantities. However, price conditions could change.

Accessories for closing metal shutters

LOCKS (part 5/5)



LACCA01



LACTI02



LACTI00

REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDI- TIONING	BAR LENGTH
-----------	-------------	-----------------	---------------	-------------------	---------------

Locks

LACCA00	Galvanised steel staple (29x8) not drilled Length: 64	0,02	U	500	
LACCA01	Galvanised steel staple (29x8) drilled Length: 64	0,02	U	500	
LACTI02	Galvanised steel lock shank (27 x 7 thickness: 1.5)	0,43	LM	10	6 LM*
LACTI01	Flat iron (25 x 4) zinc coated	0,8	LM	10	6 LM*
LACCA02	Galvanised steel staple (22 x 7) drilled Length: 55	0,012	U	500 (3)	
LACTI00	Flat iron (18 x 4) zinc coated	0,576	U	10	6 LM*

* Length in stock (tolerance of + or - 5 cm) .

(3) Possibility to order exact quantities. However, price conditions could change.

Accessories for metal shutters

HANDLES



LFACPO01



LFACPO00

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Handles made of galvanised steel

LFACPO01	Drawing handle galvanised steel perforated	0,18	U	50
LFACPO00	Drawing handle galvanised steel non-perforated	0,18	U	50


Handles made of RAL 9010 white pre-lacquered steel

LFACPO01L	Lacquer coated drawing handle RAL 9010 WHITE perforated	0,18	U	15 (3)
-----------	---	------	---	--------

(3) Possibility to order exact quantities. However, price conditions could change.

Accessories for metal shutters


STOPS

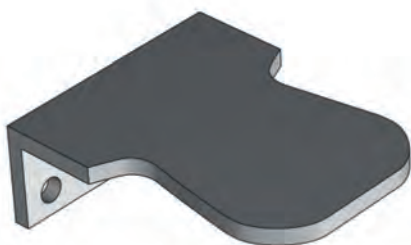

LFACAR00



LFACAR01



LFACAR02

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Stops made of galvanised steel

LFACAR00	SIMPLE STOP galvanised steel thickness: 4 mm	0,13	U	80
LFACAR01	SIMPLE ANTI-NOISE STOP galvanised steel with rubber thickness: 4 mm	0,13	U	80
LFACAR02	STOP WITH EYELET galvanised steel thickness: 4 mm	0,13	U	80

Stops made of RAL 9010 pre-lacquered galvanised steel

LFACAR00L	SIMPLE LACQUERED STOP RAL 9010 white thickness: 4 mm	0,13	U	10 (3)
LFACAR02L	STOP WITH LACQUERED EYELET RAL 9010 white thickness: 4 mm	0,13	U	10 (3)

(3) Possibility to order exact quantities. However, price conditions could change.



PROFILMAR

Accessories for metal shutters

STICK HANDLE



REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Stick handles made of galvanised steel

LFACBT00	Stick handle galvanised steel, diameter 18 Length: 1,500	0,68	U	25 (3)
LFACBT01	Stick handle galvanised steel, diameter 18 Length: 2,000	0,88	U	25 (3)

(3) Possibility to order exact quantities. However, price conditions could change.

Accessories for metal shutters

NYLON ENDCAPS



LACEN5



LACEN8



LACEN0



LACEN7



LACEN2



LACEN2I



LACEN6

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Nylon nipples


LACEN5	Nylon endcap for P57	0,006	U	500 (3)
LACEN8	Pair of endcaps for P80 slat	0,024	U	250 (3)
LACEN0	Nylon endcap for P100 slat	0,015	U	500 (3)
LACEN7	Nylon endcap for P107 slat	0,013	U	500 (3)
LACEN2	Nylon endcap for double-walled P112 slat	0.026	U	500 (3)
LACEN2I	Intermediary nylon endcap for double-walled P112 slat	0.022	U	500 (3)
LACEN6	Nylon endcap for P116 slat	0.017	U	500 (3)

(3) Possibility to order exact quantities. However, price conditions could change.

Accessories for metal shutters

ACCESSORIES FOR AXLE TUBES (part 1/2)

Layout example for cambered flats

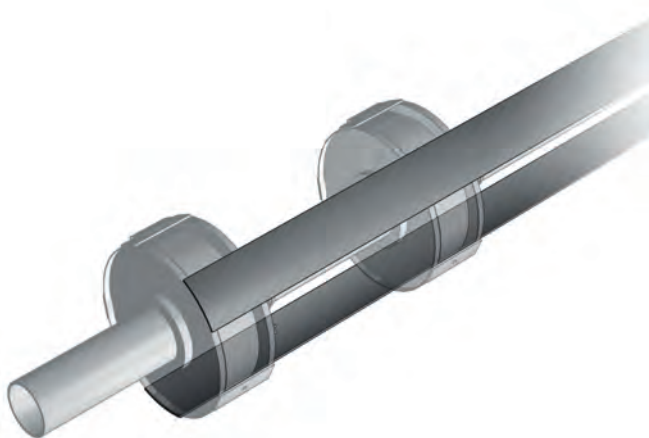

REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	-----------------	---------------	-------------------	---------------

Cambered flat made of galvanised steel (to be fastened onto spring boxes)

TOACPB70	Cambered flat Length: 70 - Thickness: 2.5	1,42	LM	(2)	8,5 LM* (1)
TOACPB90	Cambered flat Length: 90 - Thickness: 2.5	1,81	LM	(2)	8,5 LM* (1)


* Length in stock (tolerance of + or - 5 cm) .

(1) Possibility of fractioning every 50 cm (tolerance of + or - 5 cm over the lengths) according to conditioning: between 5 and 10 metres.

(2) To measure: quantity upon request, cut to exact dimensions ("C" reference provided on invoice) and possibility to order very long lengths.

Accessories for metal shutters

ACCESSORIES FOR AXLE TUBES (part 2/2)

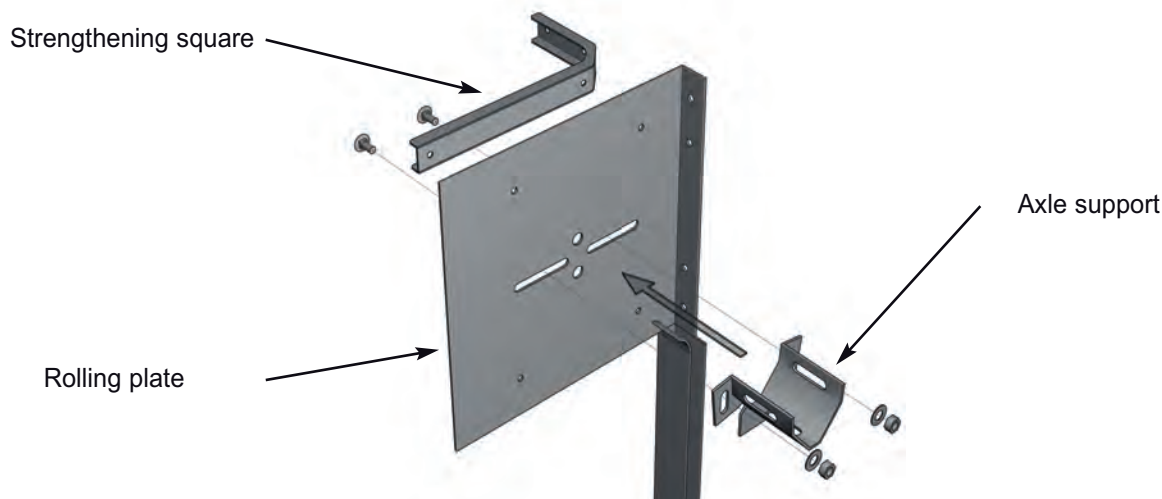

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Rolling plate made of galvanised steel

TOACPE250	250 x 250 x 3	1,60	U	1
TOACPE300GE	300 x 300 x 2,5	1,92	U	1
TOACPE300	300 x 300 x 3	2,30	U	1
TOACPE320	320 x 320 x 3	2,60	U	1
TOACPE340GE	340 x 340 x 2,5	2,42	U	1
TOACPE340	340 x 340 x 3	2,90	U	1
TOACPE370	370 x 370 x 3	3,58	U	1
TOACPE400	400 x 400 x 3	4,07	U	1
TOACPE450	450 x 450 x 3	5,22	U	1

Strengthening square for rolling plates made of galvanised steel


TOACER300	For 300 x 300 x 3 rolling plate	0,375	U	50 (3)
TOACER340	For 320 x 320 x 3 or 340 x 340 x 3 or 370 x 370 x 3 rolling plate	0,411	U	50 (3)
TOACER400	For 400 x 400 x 3 rolling plates	0,421	U	50 (3)

Axle support made of galvanised steel

TOACSP00	Axle support without screws for diameters 48 - 60 - 76 tubes Thickness: 3 mm	0,39	U	40 (3)
QDBRO00	Ø12 steel coated TRCC type bolts for axle supports	0,28	U	80 (3)

(3) Possibility to order exact quantities. However, price conditions could change.


Notes

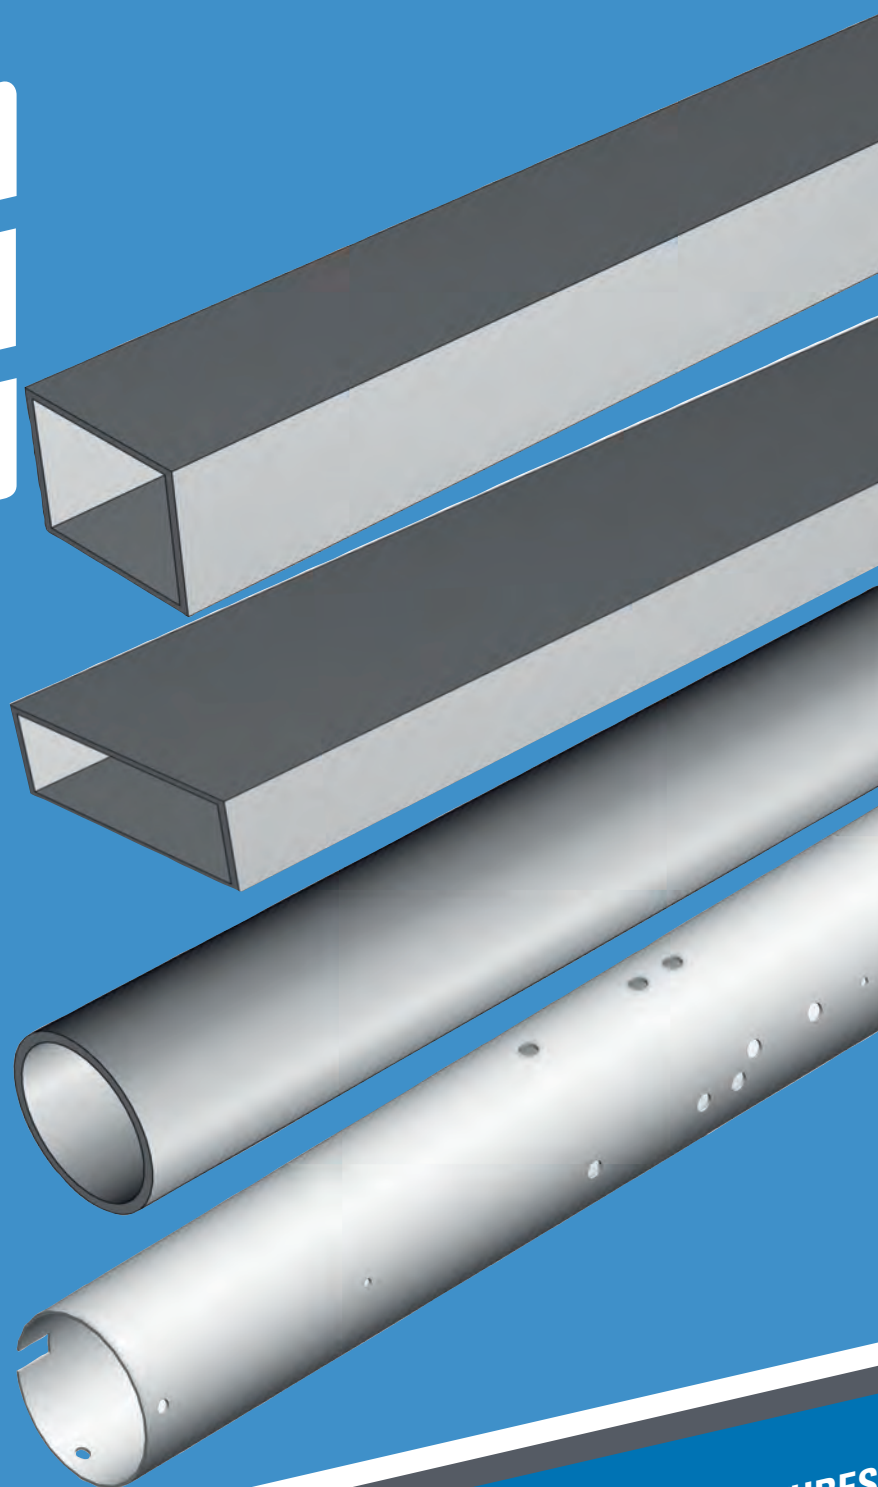

TUBES
SQUARE TUBES AND RECTANGULAR TUBES
ROUND TUBES

PROFILMAR

SQUARE TUBES AND RECTANGULAR TUBES

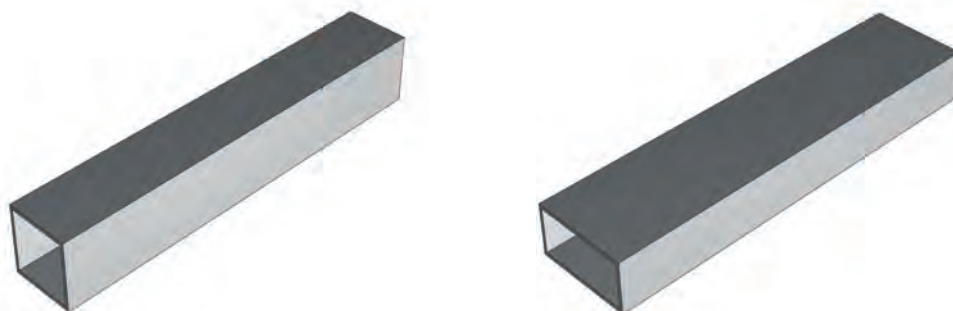

REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	-----------------	---------------	-------------------	------------

Square tubes made of galvanised steel (side x side x thickness)


TCG0250	25 x 25 x 1,5	steel galvanised	1,11	LM	1	6 LM*
TCG0300	30 x 30 x 1,5	steel galvanised	1,34	LM	1	6 LM*
TCG0350	35 x 35 x 1,5	steel galvanised	1,58	LM	1	6 LM*
TCG0400	40 x 40 x 2	steel galvanised	2,39	LM	1	6 LM*
TCG0500	50 x 50 x 2	steel galvanised	3,01	LM	1	6 LM*
TCG0600	60 x 60 x 2	steel galvanised	3,64	LM	1	6 LM*
TCG0800	80 x 80 x 2	steel galvanised	4,85	LM	1	6 LM*

Rectangular tubes made of galvanised steel (length x width x thickness)

TRG0300	30 x 10 x 1,5	steel galvanised	0,87	LM	1	6 LM*
TRG0400	40 x 30 x 2	steel galvanised	1,98	LM	1	6 LM*
TRG0500	50 x 30 x 2	steel galvanised	2,39	LM	1	6 LM*
TRG0600	60 x 30 x 2	steel galvanised	2,70	LM	1	6 LM*
TRG0800	80 x 15 x 1,5	steel galvanised	2,16	LM	1	6 LM*
TRG0801	80 x 40 x 2	steel galvanised	3,64	LM	1	6 LM*
TRG1000	100 x 20 x 2	steel galvanised	3,5	LM	1	6 LM*
TRG1001	100 x 50 x 2	steel galvanised	4,58	LM	1	6 LM*
TRG1500	150 x 50 x 2	steel galvanised	6,16	LM	1	6 LM*

* Length in stock (tolerance of + or - 5 cm) .

SQUARE TUBES AND RECTANGULAR TUBES

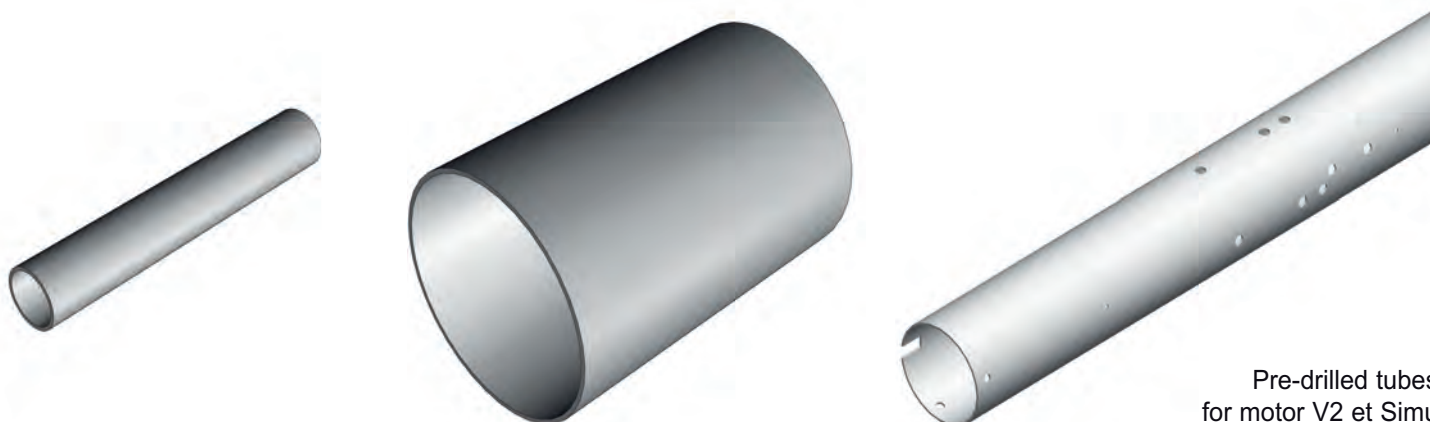

Pre-drilled tubes
for motor V2 et Simu

REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	-----------------	---------------	-------------------	------------

Square tubes made of galvanised steel (side x side x thickness)

TOG0480	48,3 x 3	steel galvanised	3,30	LM	1	7,1 LM*
TOG0600	60 x 3	steel galvanised	4,22	LM	1	9,1 LM*
TOG0601	60 x 3	steel galvanised	4,22	LM	1	5,8 LM*
TOG0602	60 x 3	steel galvanised	4,22	LM	1	7,1 LM*
TOG0760	76 x 3	steel galvanised	5,50	LM	1	6 LM*
TOG0761	76 x 3	steel galvanised	5,50	LM	1	9 LM*

Pre-drilled tubes for Central motor Simu and ACM (diameter x thickness)

TOG06_PP_3	60 x 3	steel galvanised	4,22	ML	1	3 LM*
TOG06_PP_4	60 x 3	steel galvanised	4,22	ML	1	4 LM*


Round tubes for rotating axles made of galvanised steel (diameter x thickness)

TOG1020	102 x 2	steel galvanised	4,95	ML	1	6 LM*
TOG1330	133 x 2,5	steel galvanised	8,30	ML	1	6,6 LM*
TOG1331	133 x 2,5	steel galvanised	8,30	ML	1	12 LM*

Pre-drilled tubes for motor V2 and Simu (diameter x thickness)

TOG133_PPSIMU	133 x 2,5	steel galvanised	8,30	ML	1	6,4 LM*
---------------	-----------	------------------	------	----	---	---------

ROUND TUBES (part 2/2)

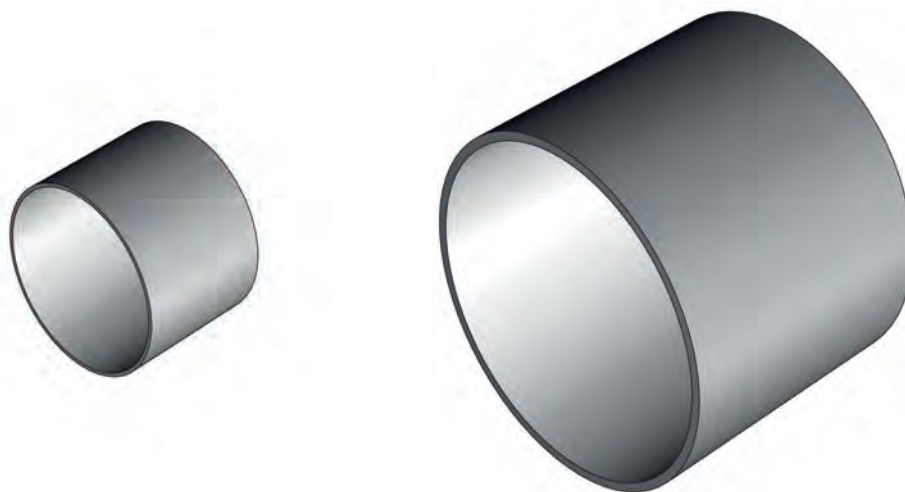




REFERENCE	DESCRIPTION	WEIGHT KG/LM	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	-----------------	---------------	-------------------	------------

Round tubes for rotating axles made of black steel (diameter x thickness)

TON1331	133 x 4	black steel	12,75	LM	1	12 LM*
TON1680	168,3 x 3	black steel	12,30	LM	1	8,5 LM*
TON1681	168,3 x 4	black steel	16,20	LM	1	12 LM*
TON1930	193,7 x 5	black steel	23,10	LM	1	12 LM*
TON2190	219 x 6,3	black steel	33,06	LM	1	12 LM*
TON2440	244 x 6,3	black steel	37,10	LM	1	12 LM*

* Length in stock (tolerance of + or - 5 cm). Please refer to us for other dimensions.

Notes

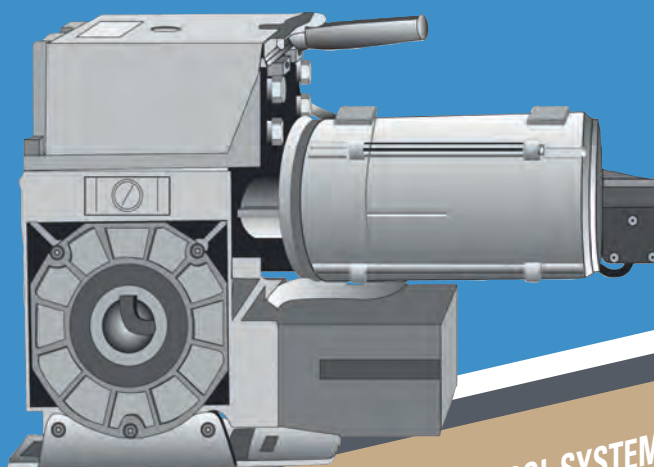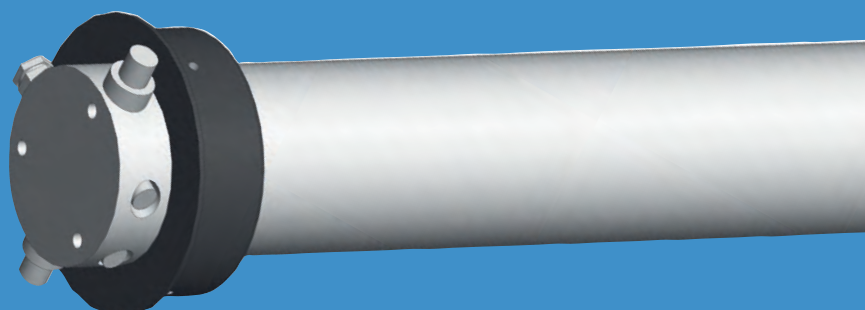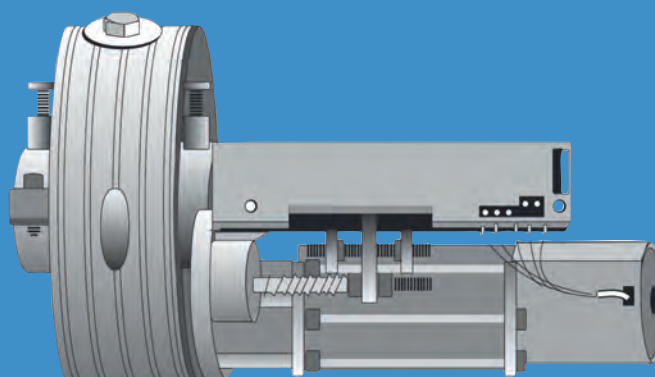


MOTORISATION, ACCESSORIES AND AUTOMATIC CONTROL SYSTEMS
CENTRAL MOTOR AND ACCESSORIES
LATERAL MOTOR AND ACCESSORIES
AUTOMATIC CONTROL SYSTEMS

PROFILMAR



PROFILMAR
Motorisation

CENTRAL MOTORS

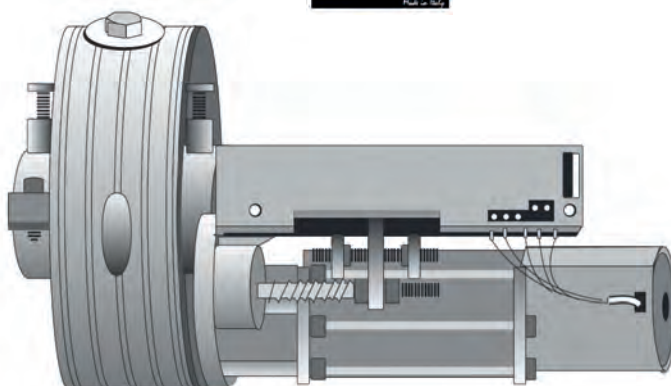

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Central motors


MC220	200 / 220 ACM type with no electrobrake	10,00	U	40
MC220EL	200 / 220 ACM type with electrobrake	10,50	1	40
MC220BEL	200 / 220 BIMO ACM type with electrobrake	18	1	40
MC240EL	240 ACM type with electrobrake	12,50	U	30
MC240BEL	240 ACM Bi-motor type with electrobrake	18,00	U	30

(3) Possibility to order exact quantities. However,
price conditions could change.


CENTRAL MOTOR ACCESSORIES



MCACEL00_N



MACBP0B



MCACCF30
MCACCF31

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Accessories

MCACPM00	Plate for ACM central motors	0,046	U	1
MCACEL00_N	Electrobrake kit for ACM central motors	1,26	U	1
MACBP0B	GEBA Up / Down button	0,10	U	1
MCACCF30	Unlocking safe with different keys electrobrake with push-button round barrel (with an in-built part)	1,60	U	1
MCACCF31	Unlocking safe with identical keys electrobrake with push-button round barrel (with an in-built part)	1,60	U	1
MCACCF91	Cylinder barrel for safes	0,30	U	1
MCACCF93	Numbered key for safes	0,01	U	1

CENTRAL MOTOR ACCESSORIES



MCACCC20
MCACCC21




MCACCF40

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Accessories

MCACCC20	Wall-mounted selector with different keys fitted with an electrobrake unblocking device	0,871	U	1
MCACCC21	Wall-mounted selector with identical keys fitted with an electrobrake unblocking device	0,871	U	1
MCACCF40	Unlocking safe with different keys (wall-mounted) European gun operated by an inside push button	0,706	U	1
LACSE14	European gun half-cylinder different keys (3 keys)	0,10	U	10
LACSE15	European gun half-cylinder identical keys (3 keys)	0,10	U	10

MOTOR ACCESSORIES (part 1/2)

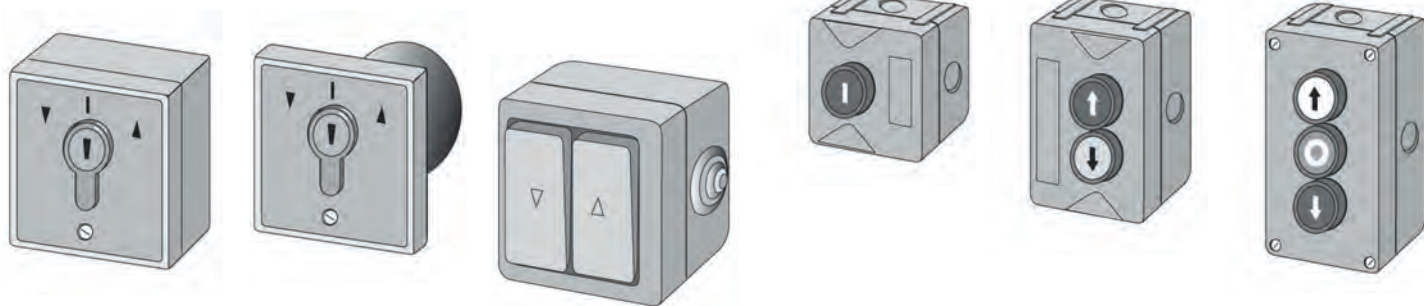

MACIN00
MACIN01

MACIN02
MACIN03

MACBP0B

MACBP01

MACBP02


MACBP03

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	---------------	--------------

Accessories

MACIN00	Exposed key switch different keys	0,40	U	1
MACIN01	Exposed key switch identical keys	0,40	U	1
MACIN02	Built-in key switch different keys	0,32	U	1
MACIN03	Built-in key switch identical keys	0,32	U	1
MACBP0B	GEBA Up / Down button	0,10	U	1
MACBP01	Push button KDT 1 -1 type button	0,18	U	1
MACBP02	Push button KDT 2 -2 type button	0,18	U	1
MACBP03	Push button KDT 3 -3 type bouton	0,25	U	1

TUBULARS MOTORS ACCESSORIES

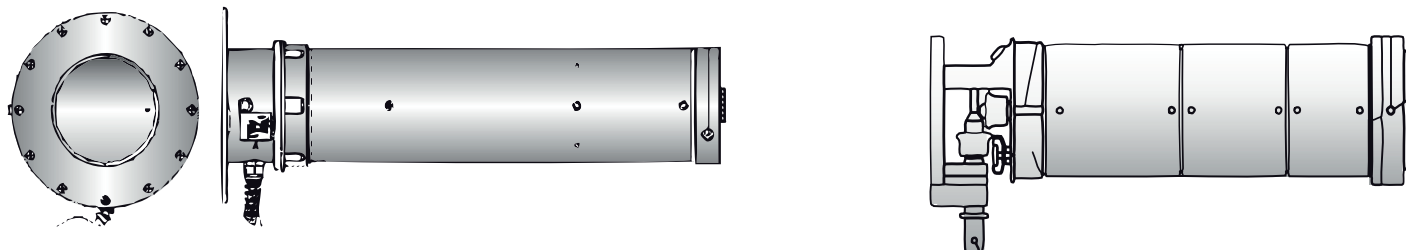

RÉFÉRENCE	DÉSIGNATION	WEIGHT KG/U	POIDS KG/U	CONDITIONING
-----------	-------------	----------------	---------------	--------------

MOTEURS TUBULAIRES ET ACCESSOIRES


MTMO300B	Tubular motor 300 Nm SINGLE PHASE + adaptation Ø133 x 2,5	U	20	
MTET133X25	TELESCOPIC END-PIECE 133 X 2.5	U	3,33	
MTJO300	OPPOSITE SIDE ROLLING PLATE 300 X 300 for tubular motor.	U	2,28	
MTJO350	OPPOSITE SIDE ROLLING PLATE 350 X 350 for tubular motor.	U	3,13	
MTJO400	OPPOSITE SIDE ROLLING PLATE 400 X 400 for tubular motor.	U	4,07	
MTJM300	MOTOR SIDE ROLLING PLATE 300 X 300 for tubular motor	U	4,47	
MTJM350	MOTOR SIDE ROLLING PLATE 350 X 350 for tubular motor	U	5,25	
MTJM400	MOTOR SIDE ROLLING PLATE 400 X 400 for tubular motor	U	6,17	

TUBULARS MOTORS ACCESSORIES



REFERENCE	DESCRIPTION	SALES UNIT	CONDITIONING
MTSMO825	Moteur tub SIMU T825 MONO 250 Nm avec M	14,000	U
MTSMO830	Moteur tub SIMU T830 MONO 300 Nm avec M	15,000	U
MTSMO835	Moteur tub SIMU T835 MONO 350 Nm avec M	26,000	U
MTSMO845	Moteur tub SIMU T845 MONO 450 Nm avec M	26,000	U
MTSMO980	Moteur tub SIMU T980 TRI 800 Nm avec M	34,000	U
MTSACAN	Anneaux pour manivelle mot SIMU	0,200	U
MTSAD133X25A	adaptation tube 133x2.5 moteur tub. SIMU T825/830	2,500	U
MTSAD133X25B	adaptation tube 133x2.5 moteur tub. SIMU T835/845	2,500	U
MTSAD133X40A	adaptation tube 133x4.0 moteur tub. SIMU T825/830	2,500	U
MTSAD133X40B	adaptation tube 133x4.0 moteur tub. SIMU T835/845	2,500	U
MTSAD168X30A	adaptation tube 168x3.0 moteur tub. SIMU T825/830	2,500	U
MTSAD168X30B	adaptation tube 168x3.0 moteur tub. SIMU T835/845	2,500	U
MTSAD168X30C	adaptation tube 168x3.0 moteur tub. SIMU T980	2,500	U
MTSAD168X40A	adaptation tube 168x4.0 moteur tub. SIMU T825/830	2,500	U
MTSAD168X40B	adaptation tube 168x4.0 moteur tub. SIMU T835/845	2,500	U
MTSAD168X40C	adaptation tube 168x4.0 moteur tub. SIMU T980	2,500	U
MTSAD193X50C	adaptation tube 193x5.0 moteur tub. SIMU T980	2,500	U
MTSAUTSD410	Armoire automatisme pour moteur tub. SIMU (MONO/TRI)	4,000	U
MTSEM280A	Equerre murale pour plaque en 280 mot. Tub SIMU T825-845	2,000	U
MTSEM330A	Equerre murale pour plaque en 330 mot. Tub SIMU T825-845	2,000	U
MTSEM400A	Equerre murale pour plaque en 400 mot. Tub SIMU T825-845	2,500	U
MTSEM450A	Equerre murale pour plaque en 450 mot. Tub SIMU T825-845	3,500	U



MOTEURS TUBULAIRES ET ACCESSOIRES

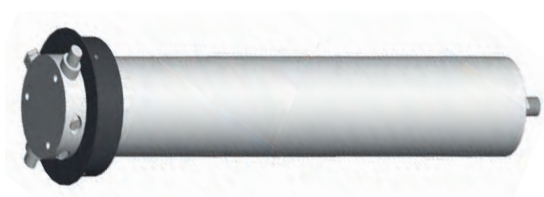

REFERENCE	DESCRIPTION	SALES UNIT	CONDITIONING
MTSJM280A	Plaque côté moteur en 280 pour tub. SIMU T825/830	2,000	U
MTSJM330A	Plaque côté moteur en 330 pour tub. SIMU T825/830	2,200	U
MTSJM330B	Plaque côté moteur en 330 pour tub. SIMU T835/845	2,200	U
MTSJM400A	Plaque côté moteur en 400 pour tub. SIMU T825/830	2,600	U
MTSJM400B	Plaque côté moteur en 400 pour tub. SIMU T835/845	2,600	U
MTSJM450B	Plaque côté moteur en 450 pour tub. SIMU T835/845	3,200	U
MTSJM450C	Plaque côté moteur en 450 pour tub. SIMU T980	5,000	U
MTSJO280A	Plaque côté opposé en 280 pour tub. SIMU T825-845	2,000	U
MTSJO330A	Plaque côté opposé en 330 pour tub. SIMU T825-845	2,200	U
MTSJO400A	Plaque côté opposé en 400 pour tub. SIMU T825-845	2,600	U
MTSJO450A	Plaque côté opposé en 450 pour tub. SIMU T825-845	3,200	U
MTSJO450C	Plaque opposé moteur en 450 pour tub. SIMU T980	5,000	U
MTSMAN15	Manivelle lg 1500 pour mot SIMU	1,500	U
MTSMAN30	Manivelle lg 3000 pour mot SIMU	3,000	U
MTSSM01	Support moteur tub. SIMU T825/830	1,000	U
MTSSM02	Support moteur tub. SIMU T835/845/980	1,000	U
MTSSP30	Support SIMU pour antichute diam30	1,500	U
MTSSP40	Support SIMU pour antichute diam40	2,000	U
MTSSP50	Support SIMU pour antichute diam50	2,500	U

Notes

ELEKTROMATEN LATERAL MOTORS

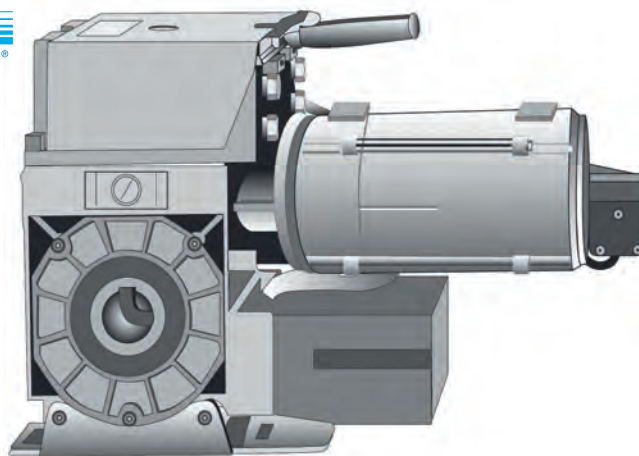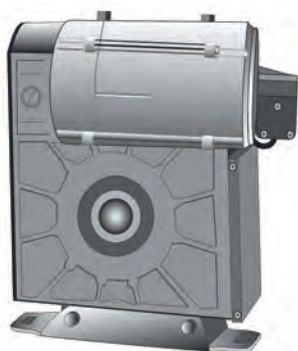

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT
-----------	-------------	----------------	------------

ELEKTROMATEN lateral motors

MLMONO250 SIK	Lateral motor single phase 250 Nm Compact (v = 10 rpm) parachute Ø =30	35	U
MLMONO250	250 Nm MONO ELEKTROMATEN lateral motor (speed=15 rpm), axle Ø =30	27	U
MLTRI250	250 Nm THREE-PHASE ELEKTROMATEN lateral motor (speed=15 rpm), axle Ø =30	21	U
MLTRI400	400 Nm THREE- PHASE ELEKTROMATEN lateral motor (speed=15 rpm), axle Ø =40	28	U
MLTRI550	550 Nm THREE- PHASE ELEKTROMATEN lateral motor (speed=15 rpm), axle Ø =40	30	U
MLTRI750	750 Nm THREE- PHASE ELEKTROMATEN lateral motor (speed=15 rpm), axle Ø =55	47	U
MLTRI1000	1000 Nm THREE- PHASE ELEKTROMATEN lateral motor (speed=10 rpm), axle Ø =55	49	U


• Possibilité d'avoir des moteurs à utilisations intensives (nous contacter).

MLTRI1400	1400 Nm THREE- PHASE ELEKTROMATEN lateral motor (speed=7 rpm), axle Ø =55	55	U
MLTRI1800	Lateral motor three phase 1800 Nm (v = 6 rpm) parachute Ø =60	57	U

- Parachute integrated into the reducer (patents), conform to applicable standards
- Delivered with a control cabinet, 1/10th limit switch and safety crank
- Service time: S3 -40% for mono-phase motors and S3 -60% for three-phase motors
- IP54 protection index

WARNING : If the motor is installed vertically, then two bearings must be fitted (1 on the motor side and 1 on the opposite side)

LATERAL MOTOR ACCESSORIES (part 1/5)

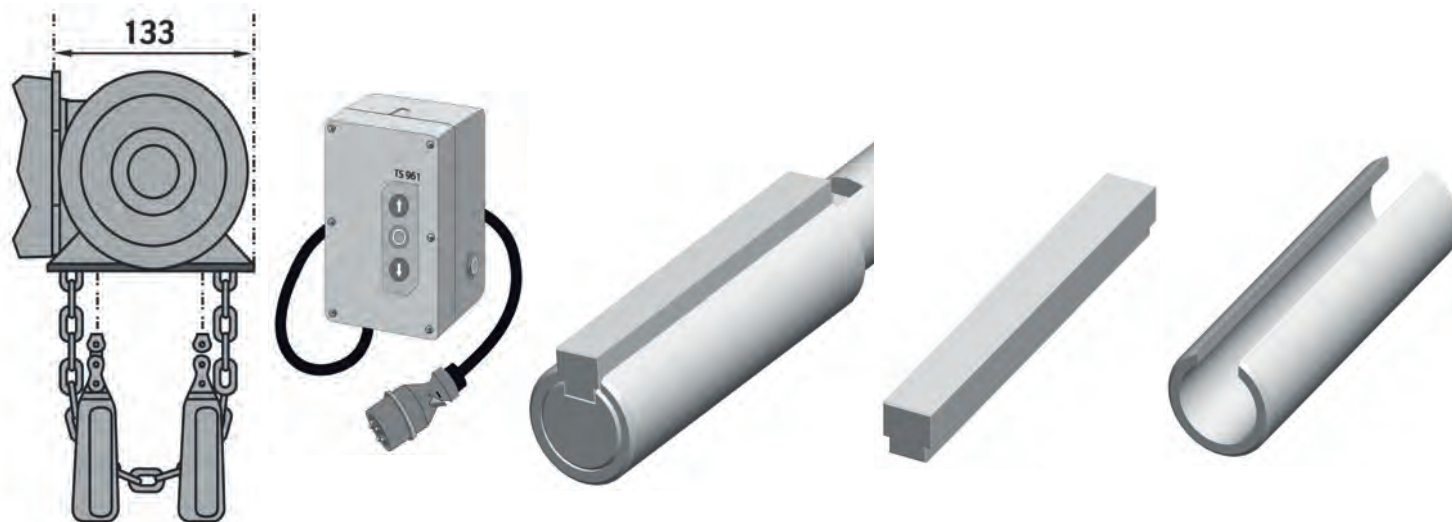

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT
-----------	-------------	----------------	------------

Chain unlocking kit

MLKITC25	Chain operating kit for lateral motor 250 SIK only	3,5	U
MLKITC40140	Chain operating kit for lateral motor 250 to 1800 Nm	3,5	U
MLKITMAIL	Link for chain kit extension - lateral motor	0,05	U
MLKITCORDE	Cord extension for chain backup (10m)	0,1	U
MLKITCHAINE	Chain for chain operating kit (50m roll)	0,5	ml

Special automatic control box for ELEKTROMATEN lateral motors

MLAUT961	Automatic control box + 5 LM of cabling	3	U
MLACIP	Interrupteur principal sectionneur cadenassable IP65	0,150	U


Standard cabinet WS900 for ELEKTROMATEN motor

MLARMWS900	Standard cabinet WS900 for ELEKTROMATEN motor	1,5	U
------------	---	-----	---


Adaptator for lateral motor

MLAD30_40	Adaptator for lateral motor, axe Ø30 à Ø40 mm	1,016	U
MLAD40_55	Adaptator for lateral motor, axe Ø40 à Ø55 mm	1,331	U
MLAD45_55	Adaptator for lateral motor, axe Ø45 à Ø55 mm	0,566	U

LATERAL MOTOR ACCESSORIES (part 2/5)

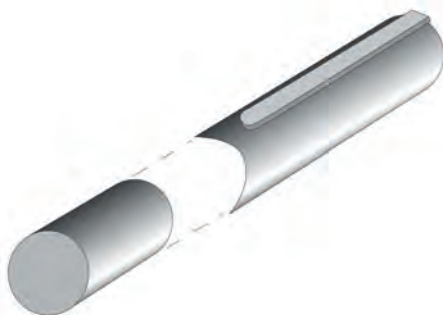

Keyed axle

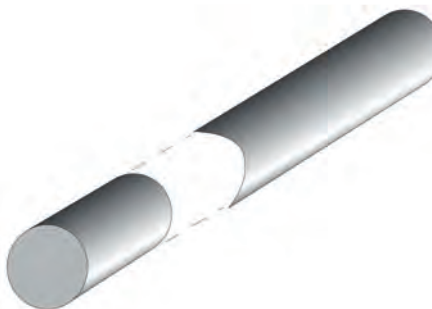

Non-keyed axle

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT
-----------	-------------	----------------	------------

Keyed “motor side” shafts

MLAS430CM	Motor side weld shaft length = 400; Ø = 30; keyed	3,3	U
MLAS540CM	Motor side weld shaft length = 500; Ø = 40; keyed	5,8	U
MLAS655CM	Welded shaft motor side length = 600; Ø = 55 pinned	5,8	U
MLAS660CM	Welded shaft motor side length = 600; Ø = 60 pinned	12	U

Non-keyed “opposite side” shafts

MLAS430CO	Opposite side weld shaft length = 400; Ø = 30; non-keyed	3,3	U
MLAS540CO	Opposite side weld shaft length = 500; Ø = 40; non-keyed	5,8	U
MLAS655CO	Welded shaft on opposite side length = 600; Ø = 55 not pinned	5,8	U
MLAS660CO	Welded shaft on opposite side length = 600; Ø = 60 not pinned	12	U

LATERAL MOTOR ACCESSORIES (part 3/5)



REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT
-----------	-------------	----------------	------------

Weld spacers

MLEN09731	Spacer outside Ø ext : 97 - inside Ø : 31 thickness: 5 mm for a 102 x 2,0 tube	0,44	U
MLEN12731	Spacer outside Ø: 127 - inside Ø: 31 thickness: 5 mm for a 133 x 2.5 tube	0,47	U
MLEN12741	Spacer outside Ø: 127 - inside Ø: 41 thickness: 5 mm for a 133 x 2.5 tube	0,45	U
MLEN12431	Spacer outside Ø: 124 - inside Ø: 31 thickness: 5 mm for a 133 x 4 tube	0,44	U
MLEN12441	Spacer outside Ø: 124 - inside Ø: 41 thickness: 5 mm for a 133 x 4 tube	0,43	U
MLEN15941	Spacer outside Ø: 159 - inside Ø: 41 thickness: 5 mm for a 168 x 4 tube	0,73	U
MLEN15956	Spacer outside Ø: 159 - inside Ø: 56 thickness: 5 mm for a 168 x 4 tube	0,69	U
MLEN16131	Spacer outside Ø: 161 - inside Ø: 31 thickness: 5 mm for a 168 x 3 tube	0,76	U
MLEN16141	Spacer outside Ø: 161 - inside Ø: 41 thickness: 5 mm for a 168 x 3 tube	0,75	U
MLEN16156	Spacer outside Ø: 161 - inside Ø: 56 thickness: 5 mm for a 168 x 2.5 tube	0,71	U
MLEN18256	Spacer outside Ø: 182 - inside Ø: 56 thickness: 8 mm for a 193,7 x 5,4 tube	1,48	U
MLEN20656	Spacer outside Ø: 206 - inside Ø: 56 thickness: 8 mm for a 219,1 x 5,9 tube	1,94	U
MLEN23156	Spacer outside Ø: 231 - inside Ø: 56 thickness: 8 mm for a 244,5 x 6,3 tube	2,5	U
MLEN25956	Spacer outside Ø: 259 - inside Ø: 56 thickness: 8 mm for a 273 x 6,3 tube	3,16	U
MLEN28356	Spacer outside Ø: 283 - inside Ø: 56 thickness: 8 mm for a 298,3 x 7,1 tube	3,78	U
MLEN30856	Spacer outside Ø: 308 - inside Ø: 56 thickness: 8 mm for a 323,9 x 6,3 tube	4,54	U

LATERAL MOTOR ACCESSORIES (part 4/5)



MLPALT30
MLPALT40



MLPALR40



MLPALS40
MLPALS55




MLCO3005
MLCO300

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT
-----------	-------------	----------------	------------

Bearings and fitting systems

MLPALT30	Ø 30 plate bearing to be directly fastened onto the rolling plate (using bolts or to be welded)	0,35	U
MLPALT40	Ø 40 plate bearing to be directly fastened onto the rolling plate by means of the adaptation washer (using bolts for a Ø > 168 tube or to be welded)	0,70	U
MLPALR40	Washer for adapting Ø 40 plate bearings onto rolling plates by means of bolts	0,50	U
MLPALS40	Ø 40 plummer block to be fitted onto fastening corner irons	0,55	U
MLPALS55	Ø 55 plummer block to be fitted onto fastening corner irons	1,15	U
MLPALS60	Base bearing Ø 60 for bracket mounting	1,25	U
MLCO3005	Pre-drilled bracket (5 mm thick) for base bearing mounting Ø 40 and parachute Ø 30	1,80	U
MLCO300	Pre-drilled bracket (8mm thick) for base bearing mounting, Ø 55	2,18	U
MLCO3008	Pre-drilled bracket (8mm thick) for parachute mounting Ø 40 and base bearing Ø 60	2.18	U

LATERAL MOTOR ACCESSORIES (part 5/5)

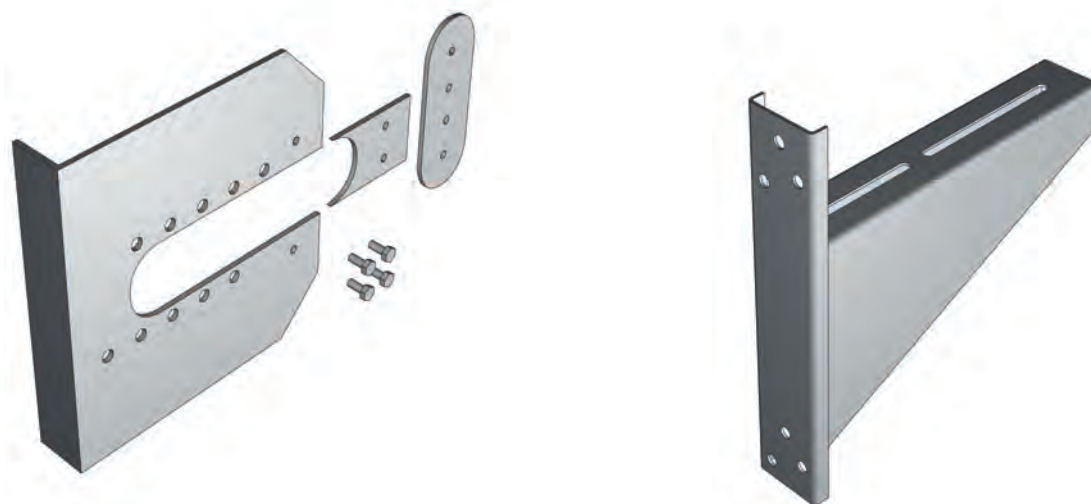

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT
-----------	-------------	----------------	------------

Removable PROFILMAR type rolling plates

MLPE30070	300 (Ø 70) thickness 5 rolling plate for lateral motors	8,5	U
MLPE34070	340 (Ø 70) thickness 5 rolling plate for lateral motors	9,2	U
MLPE40070	400 (Ø 70) thickness 5 rolling plate for lateral motors	10,5	U
MLPE50070	500 (Ø 70) thickness 5 rolling plate for lateral motors	13,2	U
MLPE60060	600 (Ø 70) thickness 8 rolling plate for lateral motors	15,8	U


Fitting brackets for lateral motors

MLCF2555	Fitting bracket for lateral motors Between 250 and 550 Nm	5	U
MLCF75140	Fitting bracket for lateral motors Between 750 and 1400 Nm	16	U
MLCF180	Fitting bracket for lateral motors Between 1800 Nm	18,5	U



PROFILMAR
Motorisation

PARACHUTES

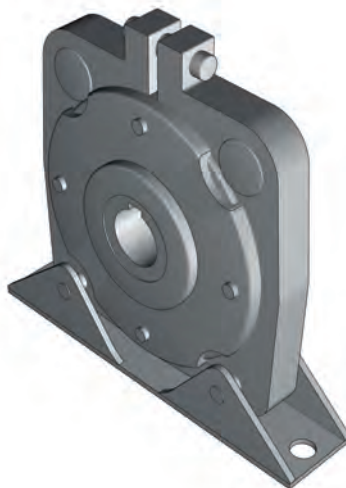


REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT
-----------	-------------	----------------	------------

Parachutes

MLTPA30	Parachute 1/2 RD 30 with switch (Cmax: 332Nm)	4,52	U
MLTPA40A	Parachute 2/3 RD 40 with switch (Cmax: 552Nm)	7,54	U
MLTPA40B	Parachute FG80-40 Cmax: 552Nm (Cmax: 800Nm)	3,5	U
MLTPA50	Parachute FG120-50 Cmax: 552Nm (Cmax: 1200Nm)	3,5	U
MLTPA60	Parachute N°4-60 Cmax: 552Nm (Cmax: 2000Nm)	29	U
MLTPA80	Parachute 6 RD 80 Cmax: 552Nm (Cmax: 3503Nm)	30	U


AUTOMATIC CONTROL SYSTEMS

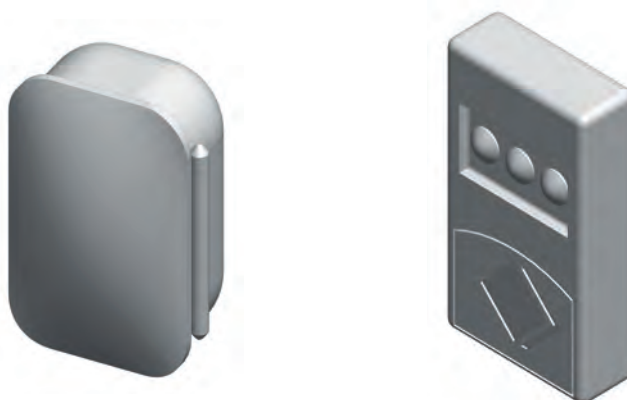

REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIO- NING	BAR LENGTH
-----------	-------------	----------------	---------------	-------------------	---------------

Automatismes

AUTCE50	Simple control system	0,382	U	1	
AUTCE60DEV	Control system with unlocking	1,122	U	1	
AUTEM5060	Transmiter for central AUTCE50 and AUTCE60DEV	0,020	U	1	
AUTCG00	Group control system 220 V (4 motors Max) (bp, selector)	0,974	U		
AUTCG01	Group control system 220 V (4 motors Max) (transmit, bp, sélector)	0,974	U	1	
AUTCE01	Metal Shutter Automatic Control System as per STANDARDS (LRS2197SET SM)	0,975	U	1	
AUTEM00	3-channel transmitter - TS3 433 Mhz for AUTCE01	0,02	U	1	
AUTAN00	Antenna for receiver - control system	0,38	U	1	
AUTFC00	Flashing light	0,4	U	1	
AUTPC40	Photo-cell set (range = 40 lm)	0,25	U	1	
AUTPC08	Photo-cell set (range = 8 lm)	0,125	U	1	
AUTRE00	2-channel receiver	0,175	U	1	
AUTBPBO	Sensor bar junction bow	0,08	U	1	
AUTBPBU	Pair of protection stops for sensor bar	0,07	U	1	
AUTBPBA	Pair of sensors for sensor bar (range = 10lm)	0,16	U	1	
AUTBPCE	Junction relay between the sensor bar and automatic control system	0,245	U	1	
AUTBPBO	3-wire cable (length = 6lm) for the sensor bar	0,22	U	1	
AUTBPJO	Profiled seal for the sensor bar (h=75mm)	0,9	LM		1
AUTBPJO_B	Profiled seal for the sensor bar (lg=12000mm)	1,0	U	1	
LFACARU	U22x8 FINAL SLAT	0,456	LM		6
MACDIG_CL1	Standard keypad for ENTRY SYSTEM (IP65)	0,92	U		
MACDIG_CL2	ANTI-VANDALISM keypad for ENTRY SYSTEM (IP65)	0,192	U		
MACDIG_PL1	CODY ENTRY SYSTEM light panel in 24 V (used with control unit)	0,362	U		
MACDIG_PL2	CODY 2 ENTRY SYSTEM panel in 220 V (pressure maintained)	0,471	U		

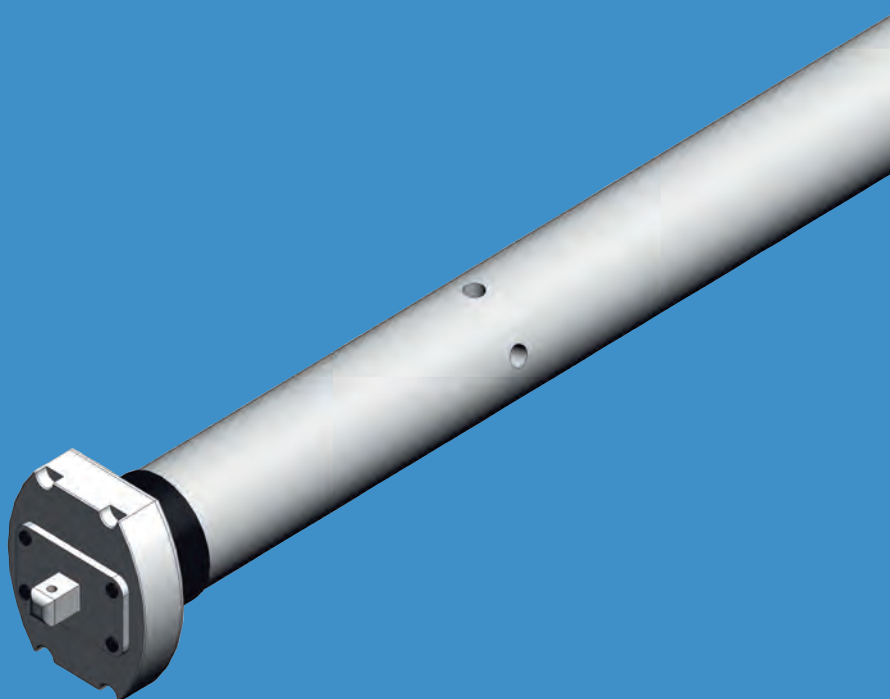


**MOTORS, ACCESSORIES
FOR WINDOWS ROLLING SHUTTERS**

PROFILMAR

Window rolling shutters

MOTORS AND ACCESSORIES FOR WINDOW ROLLING SHUTTERS

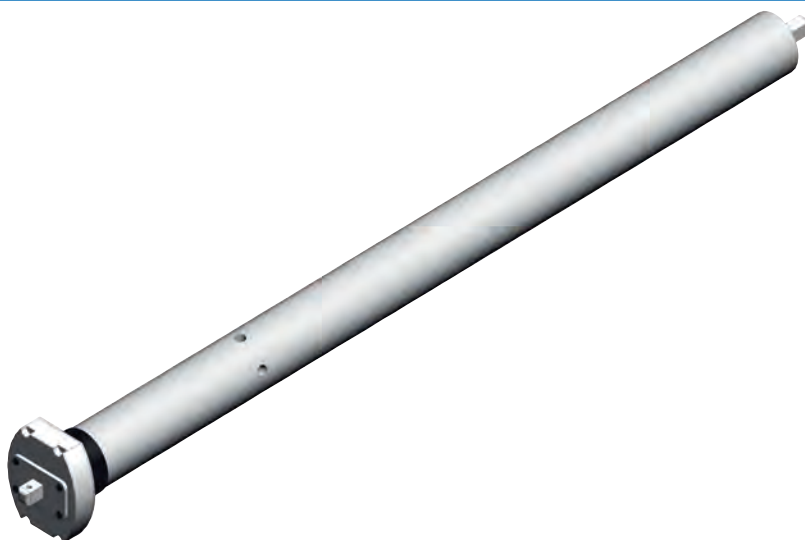


REFERENCE	DESCRIPTION	WEIGHT KG/U	SALES UNIT	CONDITIONING
-----------	-------------	----------------	------------	--------------

Accessories for window rolling shutters


VRMO015M	Motor VR ACM 15 Nm (diam45) with MS + support plate	2.900	U	1
VRMO020	Motor VR ACM 20 Nm (diam45) without MS + support plate	2,100	U	1
VRMO030	Motor VR ACM 30 Nm (diam45) without MS + support plate	2.400	U	1
VRMO030M	Motor VR ACM 30 Nm (diam45) with MS + support plate	3.000	U	1
VRMO050	Motor VR ACM 50 Nm (diam45) without MS + support plate	2.700	U	1
VRMO050M	Motor VR ACM 50 Nm (diam45) with MS + support plate	3.100	U	1
VRMO050T	Motor VR TRONIC ACM 50Nm(diam45) without MS receiv included + support plate	3.100	U	1
VRMO120	Motor VR ACM 120 Nm (diam55) without MS + support plate	4.300	U	1
VRMO120M	Motor VR ACM 120 Nm (diam55) with MS + support plate	5.200	U	1
VRACAD45	Adaptor for ring 55 to 45 for tube ZF80 and DEPRAT89	0.030	U	1
VRACAR	Quick fixing item for motor VR diam 45	0.050	U	1
VRAR45M	Articulation with eylet 45° for any motor VR with MS	0.305	U	1
VRAR90M	Articulation with eylet 90° for any motor VR with MS	0.375	U	1
VRCO45TO60	Ring for motor diam45 and tube OCTO 60	0.030	U	1
VRCO45TO70	Ring for motor diam45 and tube octo 70	0.030	U	1
VRCO45TZ54	Ring for motor diam45 and tube ZF 54	0.030	U	1
VRCO45TZ64	Ring for motor diam45 and tube ZF 64	0.030	U	1
VRCO45TZ80	Ring for motor diam45 and tube ZF 80	0,030	U	1
VRCO55TO70	Ring for motor diam55 and tube OCTO 70	0.030	U	1
VRCO55TZ80	Ring for motor diam55 and tube ZF 80	0.030	U	1
VRMANART	Articulated crank handle (1,600mm) for articulation with eyelit	1.200	U	1
VRMANFIXE	Not articulated crank handle (1,300mm) for articulation with eyelit	1.200	U	1
VRMANOCC	Eyelit for crank handle (OCCHIOLO) lg=170 mm	0.100	U	1

Window rolling shutters


MOTORS AND ACCESSORIES FOR WINDOW ROLLING SHUTTERS




ZF45



ZF64

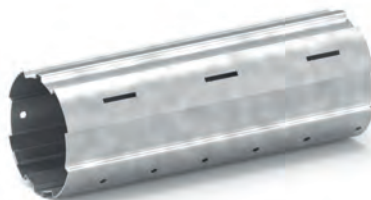

ZF54




ZF80

REFERENCE	DESIGNATION	POIDS KG/U	U VENTE	CONDITIONNE- MENT
-----------	-------------	---------------	------------	----------------------

Accessoires for volets roulants

VRPO45TO60	Pulley for motor diam45 and tube OCTO 60	0.130	U	1
VRPO45TO70	Pulley for motor diam45 and tube OCTO 70	0.130	U	1
VRPO45TZ54	Pulley for motor diam45 and tube ZF 54	0.130	U	1
VRPO45TZ64	Pulley for motor diam45 and tube ZF 64	0.130	U	1
VRPO45TZ80	Pulley for motor diam45 and tube ZF 80	0.130	U	1
VRPO55TO70	Pulley for motor diam55 and tube OCTO 70	0.130	U	1
VRPO55TZ80	Pulley for motor diam55 and tube ZF 80	0.130	U	1
VRTAC00	Telescopic cap (170-120) for VR tube ZF60	0.200	U	1
VRTAC01	Telescopic cap (270-170) for VR tube ZF80	0.300	U	1
VRTAC02	Support for telescopic cap VR ZF	0.043	U	1
VRTO4505	Tube ZF 45 EP 0.5 L = 7 m	0.595	U	130
VRTO5405	Tube ZF 54 EP 0.5 L = 7 m	0.900	U	94
VRTO6406	TUBE ZF 64 EP 0.6 L = 7 m	1.010	U	63
VRTO6408	Tube ZF 64 EP 0.8 L = 7 m	1.460	U	63
VRTO8010	TUBE ZF 80 EP 1.0 L = 7 m	2.232	U	39
VRTO8012	Tube ZF 80 EP 1.2 L = 7 m	2.660	U	39

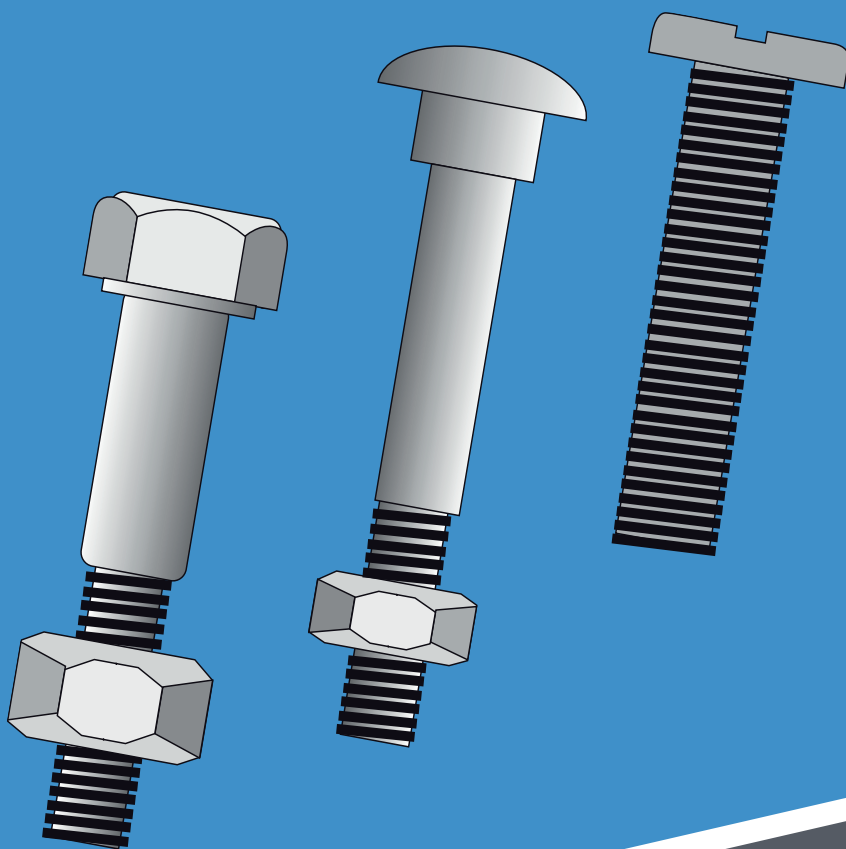

HARDWARE ITEMS


PROFILMAR

Various hardware items


BOLTS, WASHERS, RIVETS, ETC.



QDBO00
QDBO03



QDBO01
QDBO02
QDBO04




QDRO00



QDRI00



QDVI00
QDVI01



QDVI63
QDVI80

REFERENCE	DESCRIPTION	WEIGHT KG / U	SALES UNIT	CONDITIONING
-----------	-------------	------------------	---------------	--------------

Bolts, washers, rivets...

QDBO00	Zinc coated steel 6-face bolts - 10 x 80 for Ø48 and Ø60 tubes	3,26	box	50 U
QDBO03	Zinc coated steel 6-face bolts - 10 x 100 for Ø76 tubes	4,13	box	50 U
QDBO01	Zinc coated TRCC bolts- 6 x 25 for cylinder locks	2,08	box	200 U
QDBO04	Zinc coated TRCC bolts - 6 x 30 for European gun locks	2,08	box	200 U
QDBO02	Zinc coated TRCC bolts -10 x 25 for axle fixtures	3,44	box	200 U
QDRO00	Ø12 zinc-coated steel washers for axle fixtures	0,28	box	200 U
QDRI00	POP aluminium rivets - 4.8 x 10 for staples or nylon nipples	1,32	box	500 U
QDVI01	6 x 16 zinc-coated steel Poëlier screws	1,50	box	200 U
QDVI00	6 x 20 zinc-coated steel Poëlier screws	1,50	box	200 U
QDVI63	Self-tapping screws - Ø 6.3 X 16 - for fastening compensation spring	0,95	box	200 U
QDVI80	Self-tapping screws - Ø 8 x 20 - for fastening compensation spring	2,01	box	200 U

Various hardware items

SPRAYS, LUBRICANT



QDBA00
QDBA01
QDBA02



QDGR00

REFERENCE	DESCRIPTION	WEIGHT KG / U	SALES UNIT	CONDITIONING
-----------	-------------	------------------	---------------	--------------

Sprays


Q D B A 0 0	Spray 400 ml Colour: GALVA	0,55	U	12 (3)
Q D B A 0 1	Spray 400 ml Colour: RAL 9010 white	0,44	U	12 (3)
Q D B A 0 2	Spray 400 ml Colour: BROWN	0,44	U	12 (3)

Lubricant

Q D G R 0 0	Lithium-based 101 lubricant (18 litres)	16	U	1
-------------	---	----	---	---

(3) Possibility to order exact quantities. However, price conditions could change.

IP

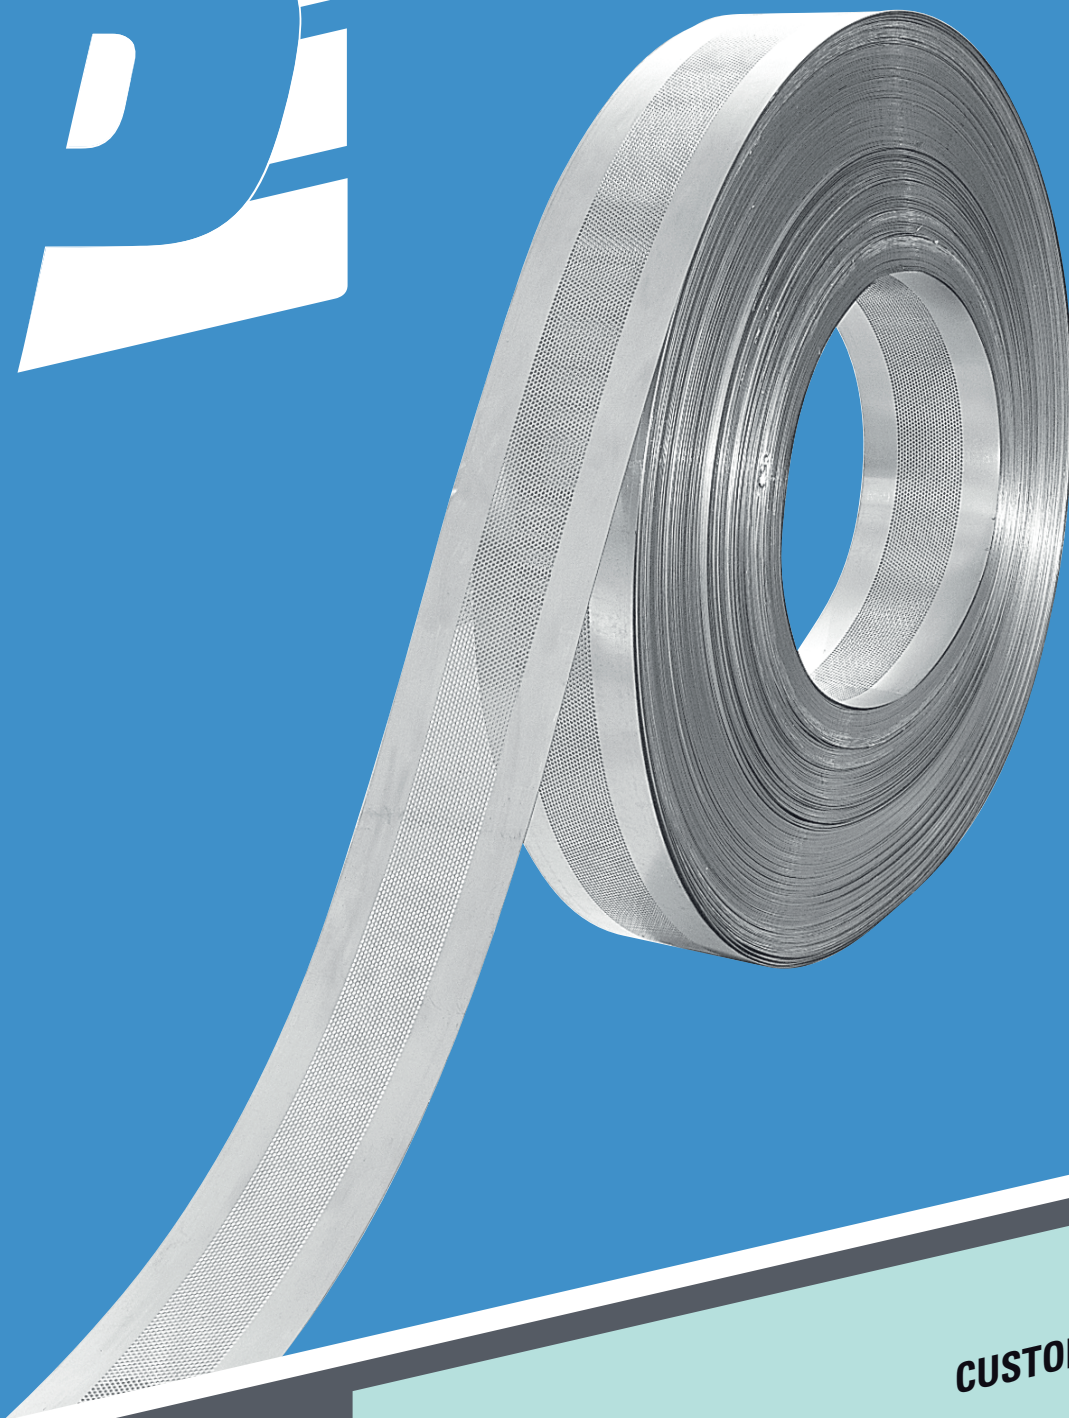

CUSTOM WORK

PROFILMAR



Grille extensible



Les grilles extensibles sont largement utilisées dans la protection des entrées des commerces, des entreprises, des bureaux et des maisons. En plus d'être robustes et pratique, grâce à un faible encombrement et un utilisation simple, elles font parties des solutions de sécurité avec un très bon rapport qualité / prix.

Ces grilles sont en acier galvanisé avec possibilité de peinture au four avec poudre polyuréthane RAL standard ou RAL spécial sur demande.

Ces grilles sont constituées de montant double profilé en U de section 15x15x15 reliés les uns aux autres par des entretoises en acier d'épaisseur 2.5 mm.



Profilé de section 15x15x15

Le fonctionnement peut-être de 2 types : suspendue à des chariots d'entraînement sur roulement à bille, ou roulant au sol sur roue porteuse avec rail spécifique.


Elles peuvent s'adapter à tous les types de pose et d'encombrement définie par le chantier




ROMBO	Nom société :
15x15x15 ep 10/10°	Contact :
2 mm	Référence :
	Date :
Délais :	Délais :

GRILLES ARTICULEES GALVANISEES




DEVIS	COMMANDE
TYPE A	TYPE B

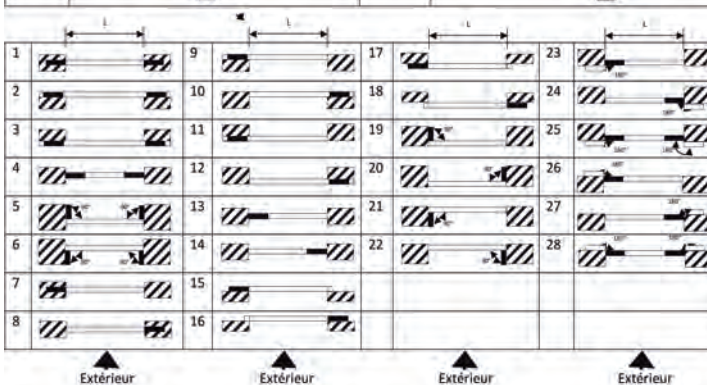1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
																											

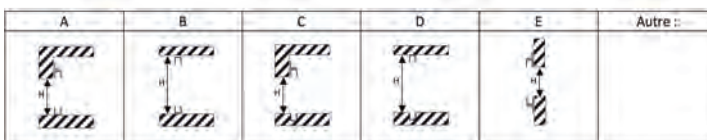A	B	C	D	E	Autre ::
					

Qtés	Type de grille	Dimensions (mm)		Disposition		Rail Bas			Type de serrure	Finition
		L	H	En largeur	En hauteur	fixe	amovible	articulé		
									Clés idem	Galva
									2 points	Laqué
									4 points	RAL :

PORTHOLE PERFORATION, LOCK PRE-LAYOUT, LACQUERING



REFERENCE	DESCRIPTION	SALES UNIT
-----------	-------------	------------

Porthole perforation

VAPERHUB0	Porthole perforation for P100 slats - 5 perforations per LM	LM
VAPERHUB7	Porthole perforation for P107 slats - 5 perforations per LM	LM
VAPERHUB6	Porthole perforation for P116 slats - 5 perforations per LM	LM
VAPERHUB2	Porthole perforation for double-walled P112 slats - 5 perforations per LM	LM

Remarks : You can personally define the distance between portholes as well as the start and end porthole perforation distances.

Pre-layout of locks

VAPRESERC	Pre-layout of cylindrical gun locks	U
VAPRESERE	Pre-layout of European gun locks	U


Lacquering

VALAQLAM	Lacquering of a slat aprons (RAL to define)	M ²
-----------------	---	----------------

Various assemblies on double-walled slats

VAMONPOL	Polystyrene assembly inside double-walled DP112 slats	M ²
VAMONLDR	Rock wool assembly inside double-walled DP112 slats	M ²

SHEET METAL CUSTOM PERFORATION

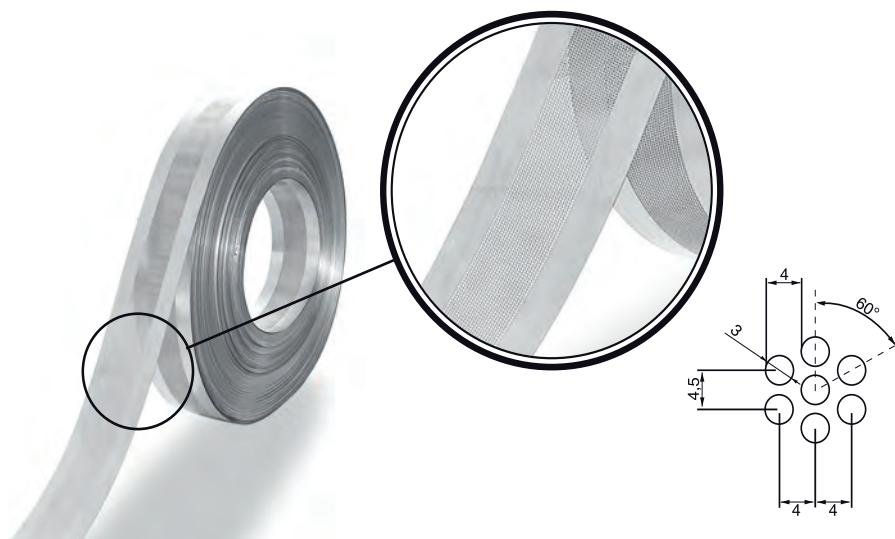

PROFILMAR PROFILMAR is specialised in the perforation of sheet metal to be used for profiling metal shutter slats as:

- **"perforated sheet metal":**

You simply specify the required perforation width and we provide the metal and perform the perforation

- **"perforation":**

You specify the required perforation width and supply the metal and we only perform the perforation

The sheet metals that we have already perforated are listed below:

- **GALVANISED and PRE-LACQUERED steel - between 0,7 and 1,1mm -**
- **STAINLESS steel (316 L) - between 0,6 and 0,8mm -**
- **Coarse and pre-lacquered ALUMINIUM - between 1,0 and 1,5mm -**

Note :

Your sheet metal perforation references and characteristics shall be created for each specific case according to your requirements.

Notes



PROFILMAR S.A.S
4, RUE DU COMMANDANT ROBIEN
13011 MARSEILLE - FRANCE
TÉL. : 00 (33) 4 91 87 97 97
info@profilmar.fr

Conditions Générales de Vente

Any sale involves the express acceptance of the following conditions without any reservation, whatever terms are indicated in the Client's documents.

If the delivery is delayed, no compensation shall be provided and the order shall not be cancelled.

Our supplies, even if they are post-paid, are sent at the risk of the Consignee, who must, in the event of any damage or loss, make an observation and use his right of action against shippers who are sole responsible.

Claims concerning quality or missing goods, which are not due to shipment, shall be expressed in writing within 8 days following acceptance.

No goods can be returned without our prior written agreement, which does not involve any acknowledgement.

Our invoices can be paid at 30 days end of month by bill of exchange except in the case of an exceptional derogation.

If no payment has been made before the specified deadline:

- Due payments generate by full right interests at basic bank rates increased by two points.
- All payments, even if not overdue, become immediately payable without any formal notice.
- Furthermore, in the case of a contentious recovery, the delinquent Client shall have to pay a penalty amounting to 15 % of the due payment. Therefore, this sum shall be due even if the main obligation has been partly fulfilled.

When the Purchaser's credit deteriorates, we reserve the right, even if part of the order has been shipped, to ask the Purchaser to provide the guarantees we consider acceptable for ensuring compliance of the commitments he/she has made. If he/she refuses to satisfy our request, we shall have the right to cancel part of or the entire order.

If the validity of the bill of exchange is extended, charges and interests related to this extension shall be at the Purchaser's charge.

In the event of any dispute, the Court of Marseille is only competent.

RESERVATION OF TITLE (Law of the 12th of May 1980)

It is expressly stated that the property rights of the delivered good shall only be transferred to the Purchaser when the total price has been paid.

Nevertheless, the Purchaser shall be responsible for the goods even if he/she is not their owner upon delivery. The Purchaser is authorised to re-sale the delivered good in his normal trade subject to the obligation that this sale must be carried out with a reservation of title. However, in the case where the good is re-sold by the Purchaser, it is considered that his/her debt security has been transferred to us.

Our products are guaranteed against material and manufacturing defects for one year. If the product is neglected, badly maintained or wrongly used by the User, the guarantee does not apply. This guarantee is strictly limited to replacing parts which have been identified as faulty in our factory. No compensation shall be provided for disassembly and assembly labour, down time, shipment fees, etc.

We reserve the property rights of delivered goods until complete payment of the purchase price (law 80.335 of the 12.5.80).

Description

page

A	AUTOMATIC CONTROL BOX for CENTRAL MOTOR	84
	AUTOMATIC CONTROL BOX for LATERAL MOTOR	78
	AUTOMATIC CONTROL BOX for TUBULAR MOTOR	74
	AUTOMATIC CONTROL SYSTEMS	84
B	BEARINGS	81
	BRACKET FOR BASE BEARING	81
C	CAMBERED FLAT	58
	CLIP for SPRING BOX	52
E	ELECTRICAL CONTACT FOR LOCK SHANK	42
	ENDCAPS (NYLON)	61
F	FITTING BRACKET for LATERAL MOTOR	82
	FELT (protective felt)	52
G	GUIDE RAILS	
	- ACCESSORIES	41 to 43
	- ANTI NOISE	43
	- ANTI STORM	44
	- REGULAR	39 to 40
	- STAINLESS STEEL	40
H	HANDLE	
	- DRAWING HANDLE	58
	- STICK HANDLE	60
	HARDWARE	91
I	IRON CORNERS	46
K	KEY SELECTOR	71
	KEY SWITCH	72
L	LOCK	53 to 56
	LOCK COVER	41
	LOCK SHANK	57
	LUBRICANT	92
M	MOTORISATIONS	
	- CENTRAL MOTOR	69
	- LATERAL MOTOR	77
	- ROLLER SHUTTER MOTOR	89
	- TUBULAR MOTOR	73 to 76

Description

page

P

PIN FOR SPRING BOX	52
POLYSTYRENE for DOUBLE WALLED SLAT	13
PORTHOLE for DOUBLE-WALLED SLAT	13
PROFILBLOCK	35 to 37
PROFILIGHT HOME	28 to 29
PROFILIGHT GLASS	32 to 33
PROFILIGHT SOLID	30 to 31
PUSH BUTTON	72

R

RING (nylon ring)	52
ROLLER SHUTTER : MOTORS and ACCESSORIES	89 to 90

S

SABOT VIRO	56
SAFETY KIT	
- for CENTRAL MOTOR	49
- for TUBULAR and LATERAL MOTOR	83
SEAL	
- for GUIDE RAILS	41
- for FINAL SLATS	9
SLATS & BOTTOM SLATS	
- GALVANISED STEEL	1 to 9
- DOUBLE WALLED	10 to 13
- ALUMINIUM	15 to 17
- STAINLESS STEEL	18 to 19
SPACER	80
SPRAY	92
SPRING	50 to 51
SPRING BOX	47
STAPLE FOR LOCK SHANK	57
STOPS	
- STOPS FOR FINAL SLATS	59
- GUIDE RAIL STOP	41
SUPPORT for AXLE (CENTRAL MOTOR)	63

T

TUBES	
- SQUARE and RECTANGULAR	65
- CORRUGATED	22
- ROUND	66 to 67
- ROLLING SHUTTER	90

U

UNLOCKING SAFE	70 to 71
----------------	----------

V

VISIS and AERO	21 to 25
----------------	----------

W

WELD SHAFT	79
WINDLOCK	45
WINDIND PLATE	
- for CENTRAL CENTRAL	63
- for LATERAL MOTOR	82
- for TUBULAR MOTOR	62



Product illustration: Profilblock©



Production: Profilight©



Certification: CE marking©

QUALITY-SERVICE INNOVATION

Our determination to contribute to the growth of our clients constantly pushes us to evolve. Therefore we provide a range of services to our partners:

- **Training in our premises**
- **Project study: sizing of large metal shutters, choice of components**
- **After-sales service**
- **Technical and commercial assistance**
- **Special and innovative manufacturing**
- **Certification and CE marking**

These assets allow us to meet the increasing number of specific requests. Aware of market developments, we rely on our design office to provide our customers with reliable and innovative solutions.

Our partners:



Industrial doors professionals trust PROFILMAR for CE marking.

As a true partner of its customers, PROFILMAR has developed a global concept for sizing and certification of metal shutters guaranteeing compliance with the European standard NF EN 13241-1 and CE marking..



PROFILMAR

BE BY YOUR SIDE
A PRIORITY

4, MONTÉE DU COMMANDANT ROBIEN - 13011 MARSEILLE - FRANCE
TÉL. : 04 91 87 97 97
info@profilmar.fr

www.profilmar.fr
www.profilight.fr
www.profilblock.fr